




A POPULAR ILLUSTRATED WEEKLY OF THE WORLD'S PROGRESS


Vol. Ct. -No. 14.]

NEW YORK, OCTOBER 2, 1909.

10 CENTS A COPY

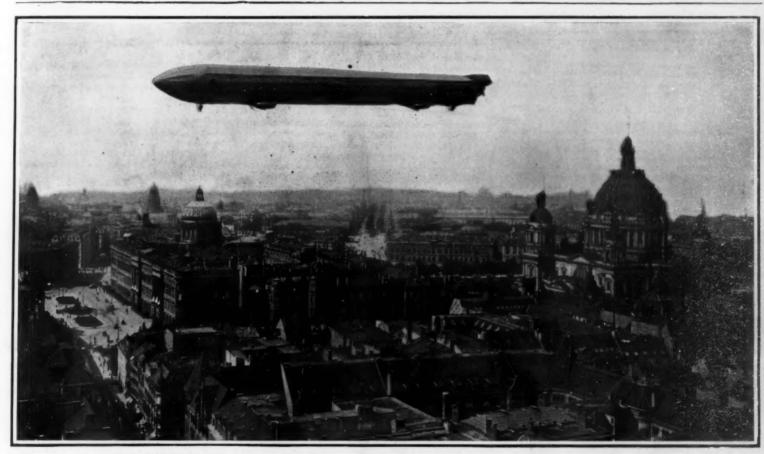

The "Zeppelin III." airship sailing over Berlin after its long-distance trip from Friedrichshafen.

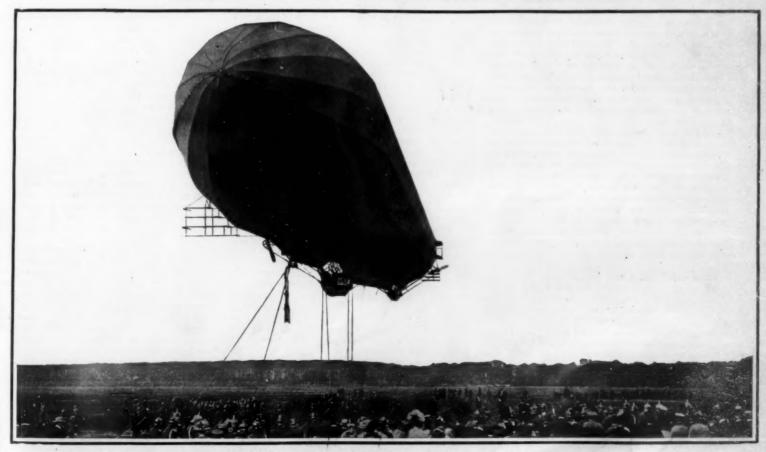

Front view of the Zeppelin airship showing it about to land at the parade ground at Tegel.

THE FRIEDRICHSHAPEN-BERLIN FLIGHT OF THE "SEPPELIN III."—[See page 349.]

SCIENTIFIC AMERICAN

ESTABLISHED 1845

MUNN & CO., Inc., - Editors and Proprietors

Published Weekly at No. 361 Broadway, New York

CHARLES ALLEN MUNN, President 36 Broadway, New York. FREDERICK CONVERSE BEACH, See'y and Treas. 36 Broadway, New York.

	SUBSCRIBERS. I States or Mexico
	a states of mezito
THE SCIENTIFIC AN	IERICAN PUBLICATIONS.
Scientific American (established 1)	8(5) \$3.00 a year
Scientific American Supplement (established 1876) 5.00 ×
American Homes and Gardens	3.00 to
Scientific American Export Editio	on (established 1878) 3.00 "
	s and rates to foreign countries, includ-
ing Canada, will be furnished upo	
	ey order, or by bank draft or check.
MUNN & I	CO., Inc., 361 Broadway, New York.

NEW YORK, SATURDAY, OCTOBER 2nd, 1909

The Editor is always glad to receive for examination illustrated article If the photographs are sharp, the short, and the facts authentic, the contributions will receive attention. Accepted articles will be paid for at regular space rates

TRUE SIGNIFICANCE OF THE HUDSON-FULTON FESTIVAL.

The splendor of the Hudson-Fulton festival stands for greater things than the mere exploitation of two individual men. Back of the music and the shouting. the blaze of color, the roar of saluting guns, and the blended laudation of press, pulpit, and platform-back, indeed, of the two men whose names are in every mouth and before every eye, are two cardinal facts of world-wide and age-long import and endurance, to which we must look for an explanation of the stupendous scale of this festival and the universal interest which it has awakened

Why do we give Henry Hudson such pre-eminence over Gomez and Verazzano, and place Fulton above Fitch, Symington, and Stevens?

The transcendent importance of Hudson's voyage to

New York Bay and up the river which bears his name is due to the fact that he explored and opened up to the world the great highway of travel which nature had laid down from the Atlantic seaboard to the heart of the American continent. Gomez and Verazzano dropped into New York Bay as they did into many another inlet, and probably gave it value as one several convenient watering places encountered on their coastal voyage.

Although Verazzano made mention of a great river. it is evident that he made no exploration to ascertain whether it was a river or an arm of the bay. Indeed, the fact that it was saline and tidal must rather have suggested a closed arm of the sea than a noble fresh water river. Henry Hudson, on the other hand, not only sailed through the river for its whole navigable length, but he noted its flora and fauna, the appearance and habits of life of the inhabitants, and everywhere appears to have made free use of the sounding lead, not only throughout the river, but in his exploration of New York Bay.

And just here we venture the suggestion that, when so astute a man as Hudson had reached the head of navigation, he probably made such investigation as language and other means of intercourse with the Indians allowed, of the nature of the country which It is not unlikely that from the Indians he learned of the extensive Mohawk Valley beyond the Hudson; of the chain of lakes to the north; and of the westward route through which by canoe and portage, the travel and traffic of the Indian tribes were maintained from the Atlantic Ocean to the inland seas of fresh water that we now know as the Great Lake

Bitter, indeed, must have been Hudson's disappointment when the shoaling of the water just beyond Albany proved to him that his hope of finding a northwestern strait leading to the Pacific was merely a dream; but his regret was mitigated to no little degree If he realized that he had found a great natural highway into a vast continent, of whose extent the Indians probably were able to give him a not unworthy esti-

But, setting all mere conjecture aside, it is certain that Hudson's careful and intelligent exploration of the Hudson River, as distinguished from the cursory and unappreciative glimpses obtained by Verazzano and possibly by Gomes, produced immediate results among the enterprising Dutch traders, and led to the founding of a city and colony destined to be come the most famous and powerful on the whole of continent. To the veni, vidi of Gomez and Verazzano, Hudson added the vici of one of the most

successful and, in its effects, memeutous voyages of exploration that the world has ever known. Right worthily does Henry Hudson bear his honors.

The work of Robert Fulton, two hundred years later, was the natural complement of that of Henry Hudson Because of the inadequate means of transportation the new colony was unable, for fully two centuries, to reap the full fruits of Hudson's discovery of this great highway to the West. It is difficult for us to realize the crude condition of travel prior to 1807. There were but few really good roads; the majority were not much better than cleared tracks through the primeval wilderness. Travel by road was laboriously slow, and salling up or down the Hudson in the cumbersome sloops of those days was little, If any, better. But the beat of the paddle wheels of the "Clermont" ushered in an entirely new method of transportation, which was destined to do more for the development of the country in a few decades than had been achieved in the two centuries preceding. The success of the steamboat was one of the causes which led to the construction of the Erie Canal. The rapid opening up of the country which followed upon the superior means of transportation thus afforded was exceeded only by that even more swift and complete settlement and exploitation, which followed on the institution of steam railroad travel. This in turn followed the same great highway through the Hudson and Mohawk valleys to Great Lakes and the far West.

Hudson in 1609, and Fulton two centuries later, may have had some glimpses of the ultimate outcome of their respective achievements; but in their wildest flights of imagination, did they dream that a thousand ships would join with a city of 4,500,000 souls to grace the scene of their early labors, and render them the present stupendous tribute?

ONE HUNDRED YEARS OF THE MARINE ENGINE.

Reminiscence and comparison will be rife during the week of the Hudson-Fulton Celebration, and never will they be more active, surely, than when that curious marine craft, the "Clermont," slowly creeps, under the impulse of her antique engine, over the waters of New York Bay and the Hudson River.

In the "Clermont" engine, as in all the Watt engines of that day, the low steam pressure of four or five pounds above the atmosphere, was made necessary by the weakness of the copper boilers. The pressure being low, the condenser was, necessarily, of vital importance; yet the vacuum could scarcely be called satisfactory, for during the trial trip of the replica of the 'Clermont," we noticed that the vacuum stood at about 224 inches. Wood was used for fuel; and probably the consumption per horse-power per hour was equivalent to not less than five or six pounds of coal.

The marine boiler and engine are greatly indebted to the activity of the Hudson River steamship builders for their early improvement. We know that compound ngines were used on this river as early as 1824, and that they showed satisfactory results. Furthermore, steam pressures of as high as 50 pounds to the square inch were used on the Hudson River long before the middle of the last century

The marine engine made slower progress in ocean navigation than on the rivers, and particularly on the Hudson. The earliest transatlantic steamers, say the period from 1845 to 1855, used boiler pres of from 10 to 20 pounds to the square inch, and the approximate consumption of fuel was from 41/2 to 31/2 pounds per horse-power per hour. From 1855 to 1865, when the paddle wheel gave place to the screw propeller, the approximate boiler pressures were from 20 to 35 pounds, and the consumption of fuel was reduced from 3½ to 3 pounds per horse-power per hour. In the ten years, from 1865 to 1875, of the development of the transatlantic marine engine, the compound took the place of the simple engine, and steam pressures rose from 35 to 60 pounds, while fuel consumption was reduced from 3 pounds to 2.2 pounds per horse-power per hour. With the introduction of triple-expansion engines during the period from 1875 to 1885, the boiler pressures were doubled from 60 pounds to 125 pounds, and the approximate consump-tion was reduced from 2.2 to 1.9 pounds per horsepower hour. Then, in that notable period from 1885 to 1895, came the twin-screw quadruple-expansion engine, with boilers using forced draft and carrying pressures of from 125 to 225 pounds per square inch. The resultant economies were remarkable, the fuel mption per horse-power per hour falling from 1.9 to 1.4 pounds per horse-power per hour.

came the most radical improvement in the marine engine in all the hundred years since the days of Fulton, when Parsons introduced the steam turbine, whose advantages ultimately proved to lie not so much in a further reduction of fuel economy, as in econo mies of weight, engine room space, consumption of oil, the great reduction of the cost of repairs and general up-keep, and above all in a great increasing of speed. Strange to say, boiler pressures, which had been mounting steadily upward, fell from the maximum of 225 pounds, as used with multiple-expansion engines, to about 150 or 160 pounds, which was found to be the most economical pressure for a turbine. The fuel consumption in high-speed turbine vessels is approximately the same as that of the very best reciprocating engines using all the modern contrivances of forced draft, superheaters, etc. Such are the conditions

which obtained during the period from 1895 to 1905. The present decade is being devoted to the development of the marine turbine, by the removal of certain defects, which at present seriously limit its usefulness. As matters now stand, the turbine drive gives its best results only when applied to comparatively highspeed vessels, and when they are driven at their maximum power. As the speed decreases, there is a loss Furthermore, the economical speed of efficiency. the propeller is an uneconomical speed for the turbine The present development is in the direction of combining the reciprocating engine with the turbine, using the former for the higher ranges of expansion and the turbine for the lower ranges. This combination gives an engine which can run economically at a low or cruising speed; that can reverse; and that can show as good economy on a cargo steamer as an allturbine engine on a high-speed vessel.

Figures have recently become available of the first n-going installation of this kind, which was placed in the cargo steamship "Otaki." Since her delivery in November, 1908, this ship has completed a voyage to New Zealand and back. She is a sister ship, except in her engines, to two other vessels, the "Orari" and "Opawa," fitted with reciprocating engines. The "Otaki" is driven by two sets of triple-expansion reciprocating engines, one on each wing propeller, and a low-pressure turbine driving a center propeller.

A comparison of the relative performance of the

two ships shows that at the full-speed trial, the "Otaki" developed 5,880 horse-power, as against 5,350 horse-power shown by the "Orari." Her coal consumption between Liverpool and Teneriffe was 11 per cent less when steaming under similar conditions and at practically the same speed. A comparison of the coal consumption for the whole of the voyage shows a gain for the "Otaki" of 8 per cent, or 500 tons of coal. The engines made a non-stop run from Teneriffe to New Zealand of 11,669 miles. The coal consumption, on the run from the Clyde to Liverpool at about half the power, worked out at 1.387 pounds per horse-power for all purposes-a most satisfactory result.

In the steam turbine we have apparently reached the limit of efficiency in the history of the steam The indications are that the developmarine engine. ments of the future will be in the direction of an internal-combustion engine, using either oil or producer gas.

COMBATING INJURIOUS INSECTS WITH THE AID OF THEIR NATURAL ENEMIES.

An interesting instance of successful warfare waged against injurious insects with the aid of their natural enemies is reported from Hawaii, where the sugar plantations have in recent years been threatened with annihilation by the ravages of a small cicada, little more than 1/16 inch long. Prof. Kirkaldy, the director of the Honolulu entomological station, has described the little insect and named it Parkinsiella saccharicida. It pierces the stem of the sugar cane and extracts the sap, causing the plant to wither and die. The formidable character of this insect pest is due to the amazing rapidity with which it multiplies. Six generations are produced annually and, on the assumption that 20 females of each brood live to reproduce their kind, it is estimated that the progeny of one female, produced the course of a single year, numbers 64 millions. The insect was undoubtedly introduced with the sugar cane from other countries into Hawaii, where it has multiplied enormously, as its natural enemies, which its numbers elsewhere, do not appear been imported with it. Entomologists were, therefore, sent abroad to discover the original home of the little cicada, to find its natural enemies, and to bring these to Hawaii. It was necessary to extend these laborious and costly investigations to every part of the world from which sugar cane plants had been imported. The home of the insect was finally located in Australia, where two of its most formidable enemies were also found. These are two species of ichneumon fly, of the genera Paranargus and Ovetertastichus, which lay their eggs in the eggs of the cicada. The first-named species destroys only the cicada eggs in which its own eggs are deposited, but the other species pierces only one egg of each cluster of cicada eggs and its larva destroys the entire cluster. Both species have been successfully colonized in Hawaii and the prodigious increase of the sugar cane cicada has thus been checked.

The first steel steamship ever built in the maritime provinces of Canada is under construction at Yarmouth, Nova Scotia. A great development is expected in this industry, which, in the days of wooden vessels, was such an important factor in the prosperity of the provinces bordering on the Atlantic coast.

ENGINEERING.

The Canadian government has decided to advise the board of engineers to call for tenders for the new Quebec bridge, to take the place of the ill-fated one which collapsed during construction. The span has been reduced from 1,800 to 1,715 feet, and plans are to be prepared for bridges of both cantilever and suspension type, the style adopted depending upon cost and speed of erection and general usefulness as compared with expenditure.

Two suction dredgers built by Messrs. William Simons & Co. for use in reclamation work by the Bombay Port Trust, which will add a square mile of land to Bombay, have given remarkable results in their acceptance trials. They are equipped with powerful spiral cutters at the end of their suction pipes, and eat their way into solid blue clay at the rate of 2,700 cubic yards an hour, discharging it 4,500 feet away through a pipe line half of which is floating. One of them has made a cut 300 feet wide at the bottom, 21 feet deep, and 1,000 feet long in 85 actual dredging

Bids have been opened on the U. S. battleships "Arkansas" and "Wyoming," and announcement of the letting of the contracts is expected. These will be the largest battleships in the world, the plans calling for 26,000 tons displacement, 545 feet over-all length, 92 feet beam, 29 feet draft, and 33,000 horse-power engines, giving a speed of 21 knots. Since the British "Dreadnought" set the fashion in all-big-gun battleships, the size and gun capacity of each new ship of the U. S. navy have been steadily increased; but these will be the first two ships to exceed all records of foreign navies. The Cramps made the lowest bid of \$4,450,000.

The steamship "Otaki," built by Messrs. Denny of Dumbarton, is the first merchant vessel to be fitted with "combination" engines, consisting of two sets of triple-expansion reciprocating engines driving wing propellers and a low-pressure turbine driven by their exhaust steam driving a central propeller. The act of reversing the reciprocating engines closes their connections with the turbine, which is not reversible, and diverts their exhaust to the condenser. Otherwise the "Otaki" is identical with the setter ships "Orari" and "Opawa" of the same company, fitted with reciprocating engines. On a recent round trip to New Zealand the "Otaki" made the same average speed as her sister vessels with a coal consumption of 11 per cent less than their mean, and a water consumption nearly 20 per cent less, their boilers being identical with hers. She also made a non-stop run of 11,669 miles, probably the longest continuous run yet made by a marine turbine.

Some interesting tests of timber under long-con tinued loads by Mr. H. D. Tiemann of the Yale Forest School were described by him in a paper read before the American Society for Testing Materials. The test specimens were continuously loaded in some cases for year or more; and their deflections under load, recovery under partial release of load, and other havior automatically recorded. As in the case of ductile metals a curious effect due to plasticity is noticed. while allowing the timber to be distorted and even to take a set, does not affect its ultimate strength. The deflections or recoveries due to immediate addition or removal of loads are independent of the deflections or recoveries due to time effect of dead loads A remarkable relation between the moisture absorbed and the strength of the beam was also shown, increase of moisture in the atmosphere causing the test specimens to increase in deflection and decrease in strength to the point of failure.

Engineering and building construction for earthquake countries is discussed in an interesting and authoritative manner by Prof. W. H. Hobbs in the current Engineering Magazine. The article summarizes the results of a number of investigations resulting from the California, Italian, Japanese, and other earth-quakes, showing the lessons learned from practice in localities especially subject to earthquakes as well as from laboratory experiments with materials. It has especial interest in reference to the suggested liability to damage by earthquake of the Gatun dam and locks Whereas it is shown that alluvial filled and other unconsolidated formations, especially when marshy, afford more dangerous building sites than solid rock near the surface on account of the tendency of the latter to dissipate a shock, it appears that co siderable displacement of underlying rock will hardly appear at the surface of overlying loose material if the latter is sufficiently deep. It is further shown that on loose material rigid buildings, especially when supported upon massive monolithic foundations, are less liable to damage than more elastic structures. It would therefore appear that the deep alluvial deposit in the old river bed under the Gatun dam, much talked of as a danger spot in the construction, represents as safe a foundation as possible in an earthquake country for the massive monolithic structure of the locks

AERONAUTICS.

On September 21st, Hubert Latham attempted a flight with his "Antoinette" monoplane at Berlin. One wing touched the ground twice with considerable shock; then a wheel collapsed and the propeller was broken. After repairs had been effected, however, he succeeded, on September 24th, in making a splendid flight of 1 hour and 3 minutes' duration.

In addition to the World's \$10,000 prize for the quickest flight by an aeroplane or dirigible from New York to Albany, the American has offered a prize of \$1,000 for a circuit of Manhattan Island by an aeroplane. Three airships are ready to start in the first-mentioned contest, these being the dirigibles of Capt. Baldwin, John Roeder, and George L. Tomlinson. The start will be made from 119th Street and the Hudson River.

The flights of Wilbur Wright and Glenn H. Curtiss above New York Bay and the Hudson River during the present week are to be the leading feature of the Hudson-Fulton Celebration. The flights will be announced by flag signals displayed from the Singer and Metropolitan towers, and by bombs, as follows: White flag with red center—weather favorable, flight will probably take place in the afternoon. Black flag with white center—weather unfavorable; no flight to-day. White flag with red center over red flag with white center—flight will probably take place within the hour. Red flag with white center over white flag with red center—flight will take place within 15 minutes. The same with black flag with white center below both—flight has started.

At Morris Park late in the afternoon of September 23rd, Charles Crout made a short flight of 60 feet at an elevation of about eight feet with a new biplane built by François Raiche, a member of the Aeronautic Society. This is the first aeroplane built by a member to succeed in getting off the ground. It was run along the track at a speed of 15 to 18 miles an hour against a 12 to 15-mile wind when the flight was accomplished. The balancing planes were not operative, and the aeroplane tipped in alighting and damaged one end of the lower plane. Exhibition flights will be made soon with this machine throughout the country. The aeroplane has been acquired by the Scientific Aeroplane and Airship Company, which will conduct the exhibitions with it and also with several monoplanes which the company has produced.

In the course of his exhibition flights recently at Berlin, Orville Wright made several new records. On September 18th, with Capt. Englehardt as passenger, he flew 1 hour, 35 minutes, and 47 seconds, thus beating by 23 minutes and 11 seconds his previous record with a passenger. During this flight he sent his machine beyond the limits of the Tempelhof parade ground and soared over the railroad tracks and houses in the vicinity. In a subsequent attempt during the same day to beat the speed record, the water circula tion of the motor gave out, and he was obliged to descend after a flight of 1 hour and 24 minutes. A few days before Orville Wright flew at an estimated height of 50 meters above a balloon anchored at a height of 175 meters, thus making the altitude he reached probably over 750 feet. Rougier, on the 20th ultimo, attempted to break this record at Brescia, Italy, his Voisin biplane. He succeeded in making an official record of over 198 meters (650 feet). Mr. Wright will probably fly at the aviation meeting at Berlin during the present week, after which he will go to England, in order to test the first Wright aeroplanes built there for the British government.

The day following his arrival from Europe, Glenn H. Curtiss, the winner of the Bennett aviation trophy and the present holder of the Scientific American well, was given a luncheon at the Lawyers Club by the Aero Club of America. Among the dis tinguished guests present were William Marconi, the inventor of wireless telegraphy, and St. Clair McKeleditor of the Brooklyn Eagle. The latter told of a trip to Goshen, N. Y., back in 1867 in Andrew's dirigible, an account of which was subsequently published in the Scientific American. This airship (which was made to travel in any desired direction by means of long inclined planes between the triple, parallel, cigar-shaped gas bags, the planes caus ing the balloon, as it rose from the buoyancy of the gas, to ascend upon a long incline) on this occasion traveled as far as Goshen, N. Y. (50 miles), whence it was blown back by the wind across Long Island Sound to the eastern end of Long Island, where a cessful landing was accomplished. In view of his exploit 42 years ago in this, the first dirigible balloon, Mr. McKelway believed himself to be the oldest aero-The mayor of Baltimore, Md., naut present. telegram announcing the flight of Lincoln Beachy from that city to a point in the Blue Ridge Mountains, 125 miles away—a flight which is probably the longest ever made in America with a dirigible balloon. The aeroplane with which Mr. Curtiss won the Bennett trophy will be exhibited at Wanamaker's store in New York this and the coming w

SCIENCE.

The record of altitude in aeronautics has been attained by Sig. Placenza and Lieut. Mina, in an ascension made from Milan on August 10th, 1909. Their great spherical balloon, the "Albatross," carried 2,600 pounds of ballast at the start and reached an elevation of 38,700 feet, or more than 7 miles. The aeronauts experienced a temperature of —25.6 deg. F. and landed near Milan 3½ hours after they started.

The great tidal waves observed at Marseilles on June 15th, 1909, appear to have been caused by the unusually high electric charge of the atmosphere which is known to have existed during the period of the earthquakes which devastated the south of France. The powerful attraction exerted on the surface of the earth by this electric charge caused earthquakes on land and tidal waves in the Mediterranean.

Prof. Percival Lowell has noted at his Flagstaff Observatory that the antarctic canals of Mars are disappearing. This waning of the much-discussed canals seems to be a well-recognized phenomenon. Long ago Prof. Pickering suggested that we see not really the canals, but rather the vegetation which fringes their banks. The waxing of the canals in spring and summer and their waning in autumn and winter is not unreasonably attributed to the growth and decay of this vegetation.

In accordance with the resolutions of the last International Congress of Mining and Metallurgy. Applied Mechanics, and Practical Geology held at Liége in 1905, it has been arranged that the next Congress shall meet at Düsseldorf during the last week of June, 1910, under the auspices of the Rhenish-Westphallan Mining Industry. An influential committee of organization has been formed, which is charged with the making of the arrangements for the reading and discussion of papers, visits to places of technical interest, and social entertainments.

A letter has been received at Harvard Observatory from Prof. E. B. Frost, director of the Yerkes Observatory, stating that Halley's comet was observed visually by Prof. S. W. Burnham with the 40-inch telescope, on September 15th, 21 h. 39 m. G. M. T., in app. R. A. 6 h. 18 m. 51.1 s. and app. Dec. +17 deg. 9 min. 44 sec. The comet followed B. D. +17 deg. 1232 by 12.7 min., north 4 min. 12.1 sec. The comet was also photographed with the 2-foot reflector on September 15th and 16th by Mr. Oliver J. Lee. A second letter received at this observatory from Prof. Frost states that the comet was also observed visually by Prof. E. E. Barnard on September 17 d. 21 h. 1 m. 30 s. G. M. T., in app. R. A. 6 h. 19 m. 0.9 s. and app. Dec. +17 deg. 9 min. 0.8 sec. The comet followed A. G. 2122 (=+17 deg. 1232) by 0 min. 22.55 s., north 3 min. 28.9 s. Description: 15½ mag. 12 s. diameter, with possibly a faint nucleus or indefinite fleck of light in it. The comet was also photographed by Mr. Lee at the came time.

The astronomers of Lick Observatory have been making some spectroscopic studies of Mars from the top of Mount Whitney. This peak is the highest in the United States, its altitude being 14,501 feet above sea level. The instrument taken by the observers was a 16-inch horizontal reflecting telescope, to which a suitable spectroscope was attached. Of the seven nights spent by the men on the summit, only two were clear enough for observation. The spectrum of Mars was compared with the spectrum of the moon. It is known that there is no water vapor on the moon, certainly in no appreciable quantity. If no difference can be detected between the spectrum of Mars and the spectrum of the moon under these most favorable conditions, it can be said with safety that water exists on Mars in negligibly small quantities. The results of this expedition have not as yet been published. Readers of this column of science notes will doubtless remember that Mr. Slipher of Prof. Lowell's staff claims to have obtained spectroscopic evidence of the existence of water vapor on Mars.

On July 26th, 1909, the Singles coal mine, in the French district of Puy de Dome, was the scene of an accident similar to that which occurred some time ago in the Gard mines. At the Singles mine an interior shaft was being sunk for the purpose of determining the depth of the deposit. This shaft was sunk from a horizontal gallery which led from the foot a shaft, 1,000 feet deep. The explosion of a powerful blast shattered the rock and caused the disengagement of great volumes of carbon dioxide, which filled the gallery and both shafts before all the miners could take refuge in the safety chamber. This mine pos-sessed no oxygen life-saving apparatus and the manr was absent at the time of the accident. The life saving corps of several mines in the vicinity responded promptly to appeals by telephone, but no effective work could be accomplished until several hours had elapsed. Of twelve miners who had been entrapped, seven had passed the day in terror in the 3h fety shelter, but the remaining five were found suffocated in the gallery.

HOW WE GET STANDARD TIME.

BY HARLAS T. STETSON.

Although it may be generally known that the determination of time is the work of the astronomer, yet doubtless few people stop to investigate the precise methods employed in the correction and distribution of standard time. It is a system in itself quite indispensable to the success of the industrial world.

The great universal timekeeper is the earth itself. So uniform is the earth's rotation on its axis, that the length of the day according to Newcomb has not altered

the 1/100th, and probably not the 1/1000th part of a second since the beginning of the Christian era The direct effect of this rotation is the apparent revolution of the celestial sphere, or the daily motion of the sun, stars, and planets across the sky. As places on the earth are determined by latitude and longitude, so stars are located by right ascension and declina-Every conspicuous star has its position carefully determined, and from a star catalogue the astronomer knows at once the instant of culmination or meridian passage of any given star. If with a suitable instrument an observation of a star's transit across the meridian can be ob-tained, and the time of its occurrence be noted by a clock chronometer, a comparison with the catalogue will disclose the amount by which the clock or chronometer is fast or slow. Such an operation of finding the clock error is always what astronomers understand by the expression "obtaining time." The instrument

used for making these observations is known as the transit instrument, and consists essentially of a telescope so mounted as to be capable of swinging about a horizontal axis in the plane of the meridian. The accompanying illustration shows such an instrument ready for the observation. In the eye-piece of the telescope is placed the reticle, comprising a number of spider webs, of which the attached diagram shows five to be stretched vertically and two horizontally across the field of view. The instrument is so adjusted that the middle one of the vertical threads coincides as nearly as possible with the imaginary circle in the sky called the meridian.

When observations are to be made for determining time, the astronomer first turns to the Ephemeris or some catalogue of stars, and se-lects a star which is soon to culminate, then from the declination he mentally calculates the altitude at which the star will transit. means of a reading circle attached to the instrument he sets the telescope at the proper angle that the star will pass through the field of view. Either of two methods may now be employed in making the observations. The first and older of the two is known as the "eye and This consists of watching the star mass through the field, and while listening to the half-second beats of the chronometer, estimating to the nearest tenth of a second the time which the star crossed each thread reticle. In the "chronographic method," now much used, the mind has less to do, and hence more accurate results can be obtained. Here as before the astronomer watches the passage of the star across the threads of the reticle, but in-stead of esstimating the time of transit, he presses a telegraphic key at the proper instant. The key is in electrical connection with an instrument called a chronograph, and an automatic record is made of each observation Either method will leave a record for the five threads similar to the following, the Roman numerals designating the number of each thread


OUTGOL N	P.D.	- 1	W 3	95	72.		- 4	49	9.7	, p	v	19.	٠,											
I												a		0	0					0			٠	16.7
II							0	0										0	0	۰	,	0	0	25.5
111						,												۰		0		0		34.3
IV																 	0	0	3	0			0	43.0
V		0														7	b	١.			9	n	a.	51.78.
																								34.248

The above is the actual result of a set of observations made by the writer, using the eye and ear method. The figures in the "seconds" column were written immediately after the transit of each thread; the hour and minute were filled in at leisure after the last observation.

The mean of these observations will give a more precise result for the transit over the middle thread than a single observation could afford. The exact right ascension of the star we will suppose to have been known as 6h. 58m. 35.95s., which equaled the cor-


rect time of the star's transit. The chronometer, however, recorded the time of transit as 7h. 9m. 34.24s., and was therefore fast by the amount of 10m. 58.29s.

Were the instrument in perfect adjustment, and were there no personal element to enter into the result, such a set of observations would be quite sufficient. As a matter of fact, however, there are always small errors in the instrument, which must be determined and applied as a correction to the final result. The astronomer therefore does not rely wholly upon a single record like the above, but will usually repeat the observation

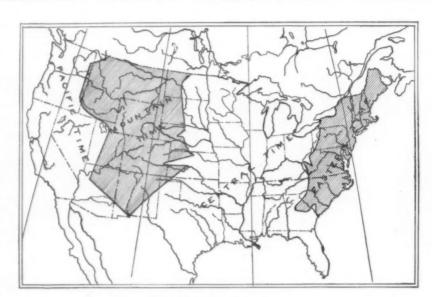

STANDARD TIME BELTS OF THE UNITED STATES.

with a number of different stars on the same night. From these numerous records he is able to deduce the necessary corrections, and thus obtain a more accurate value for the chronometer error. Time thus determined, ordinarily correct to within one-tenth of a second, is sidereal time; and though very useful to the astronomer, is quite unsuited to the use of the world in general, whose activities are governed by the rising and setting of the sun, and not the stars. Sidereal time must therefore be converted into solar time. This is easily effected by a simple calculation constant-

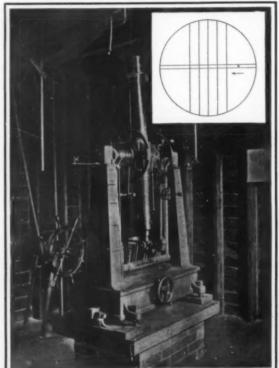

AN OBSERVATORY TRANSIT INSTRUMENT FOR DETERMINA-TION OF STANDARD TIME. DIAGRAM SHOWS RETICLE OF TRANSIT.

ly employed by the astronomer. Having then obtained solar time, there remains only to distribute it to the outside world.

Until within the last twenty-five years each community used its own local time, but as travel became more extensive it was found quite inconvenient to alter one's watch and system of time reckoning for every few miles of traveling east or west. Accordingly, in the year 1883 the United States adopted the present system of standard time. The whole country from the Atlantic to the Pacific was divided into time belts of ap-

proximately fifteen degrees in width. The "Eastern" belt, extending as far west as Buffalo, uses the time of the 75th meridian, which is very nearly that of Philadelphia, and is five hours slower than Greenwich time. Crossing into the "Central" belt, watches are set one hour earlier, as the time employed is that of the 90th meridian, six hours behind Greenwich time. Similarly, "Mountain" time uses the 105th meridian, seven hours behind; and the "Pacific" belt adopts the 120th meridian time, just eight hours slower than that of Greenwich. Such a system is quite indispens

able to railroad lines, and hence standard time is sometimes called "railroad time." At present almost every civilized country is using some system of standard time, usually under the control of its own government.

The chief source for standard time in the United States is the Naval Observatory at Washington, D. C. Here high-grade clocks are carefully regulated by observations of the stars at night, and all necessary corrections applied. For the five minutes preceding noon of each day, eastern time the Western Union and Postal Telegraphic companies suspend all ordinary business, and throw their lines into connection with the Washington Observatory. It is so arranged that the sounders all over the lines make a stroke each second during the five min utes until noon, except the twentyninth of each minute, the last five econds of each of the first four minutes, and the last ten sec of the fifth minute; then follows the final stroke at exact noon

This affords many opportunities for the correction and setting of timepieces throughout the country. The Western Union Company also operates a system of some 30,000 clocks, which automatically set themselves by the noon signal each day.

In addition to the Washington signals, many smaller observatories determine and distribute time in a similar way to jewelers and local railroad lines. In most of the larger seaports, time balls are dropped at noon, and give mariners an opportunity to correct their chronometers. Fire-alarm companies aid in the dis-

tribution of time in many localities by sounding bells at certain specified times each day, thus affording the public a convenient source of "correct time" with a reasonable degree of accuracy.

thi

cra

she

The Destruction of Rats with Carbon Disulphide,

M. de Kruyff, of the agricultural bureau of the Dutch Indies at Buitenzorg, Java, has published an interesting article on the destruction of rats. The various contagious diseases which have been recommended for this purpose have been found useless in the tropics and have not always proved effective, even in the temperate zone. Hence De Kruyff's experiments will be of general interest. After working four years with numerous viruses without succeeding in creating an epidemic or even killing a single rat, De Kruyff obtained more encouraging results by employing carbon disulphide in the following manner: All visible ratholes were first stopped with earth for the purpose of ascertaining which holes were habited, for the inhabited holes were found reopened on the following day. Half a teaspoonful or less, of carbon disulphide was poured into each of these holes and, after waiting a few onds to allow the liquid to evaporate, the mix ture of vapor and air was ignited. The result was a small explosion which filled the hole with poisonous gases and killed all the rats almost instantly. A pound of disulphide, costing about 10 cents, is sufficient for more than 200 rathe 131 dead rats were found in 43 holes which were opened after the operation. In two cases, 10 rall were found in a single hole.

The process is, therefore, very cheap and its results are immediate and absolutely certain.

It is calculated, states a contemporary, the United States is producing the following per wee for fifty-two weeks in the year for every man, woman and child of the population of ninety millions: Three quarters of a pound of wire, more than three-quarter of a pound of ralls, half a pound of structural shapes three-quarters of a pound of plates, one-third of a pound of sheets, three-quarters of a square foot of tin-plate, two and a half pounds of bars, hoops, etc. four pounds of iron castings. These and other for ished iron and steel products make a total of tweets to thirteen pounds each week per head.

9.

ern"

time t of wich

are it of

ime.

the

alled aly is dard ol of

the thing-locks beer and blied. dding time, costal pend hrow with a ders troke minenty-t five four conds

ction

The m of

elves

aller

simi-

their

dis

nding thus

racy.

of the

ished

rats.

been

roved ce De

erest.

demic

arbon

r the re in-

in.

Scientific American

CORRUGATED SYSTEM OF SHIP CONSTRUCTION.


The interest of the shipping world has been aroused by a new departure from the ordinary lines of ship construction, as exemplified in the steamship "Monitoria," which recently left the Hylton shippards of Messrs. Osbourne Graham & Company of Sunderland. This vessel of 3,300 tons marks a new development in shipbuilding design, being built upon what is known as the Monitor or corrugated system. For several

The very important result is obtained in this design that the projections give considerable increase in the hogging and sagging strength, so that the stress on the material is reduced at both keel and gunwale. The construction of the sides of the ship with these corrugations is rather an addition than a vital alteration of the main structural system, and it can be applied to any type of steamship. The builders claim that the extra cost is slight; and the dead weight

columns. In the experiments on the banks of the Seine endeavors have been made to control the torpedoes from a small boat about 100 meters (328 feet) distant from them, containing a plant for producing Hertzian waves.

The torpedo motor was started and stopped at will, and the rudder turned in every direction at the will of the man in the boat.

The improved Gabet torpedo consists mainly of a

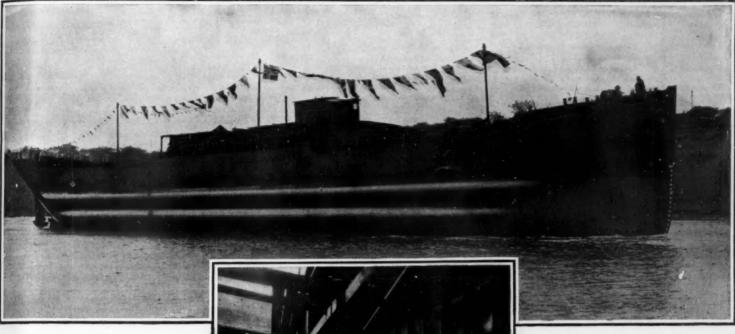

years past experiments have been carried out by the Monitor Shipping Corporation of Newcastle-on-Tyne, to determine the best method of increasing the longitudinal strength of a ship without any corresponding increase of weight. To this end the underwater part of the hull between the light and load lines was corrugated for almost the entire length of the vessel. Continued investigation and experiment resulted in ascertaining the definite form of this corrugation, and at last it was resolved to test the system practically in a full-sized vessel. The Ericsson Shipping Company, of Newcastle-on-Tyne, undertook to build a craft on these lines, and the "Monitoria," now on her first trip, was the outcome. The vessel measures 279 feet in length by 40 feet 1½ inches normal extreme breadth, increased by the Monitor projection to 42 feet, with a molded depth of 20 feet 7½ inches. In the accompanying illustrations the forms of con-

In the accompanying illustrations the forms of construction of the corrugation are clearly shown. The shell plating is swelled out in two places on either side longitudinally, the curve being somewhat flat, and the upper and lower edges curving gradually into the flat side of the normal vessel. The main frames measure 8 inches by 3 inches, and the depth of the corrugation is 11½ inches at the crown. Plain angles are attached to each main frame and a corrugation gusset plate at each frame. There are no side stringers.



These corrugations increase the stiffness and longitudinal strength of the vessel

THE "MONITORIA"—A CORRUGATED SYSTEM OF SHIP CONSTRUCTION

carrying capacity is increased from three to four per cent. The coal bill is reduced from 12 to 15 per cent for the same speed; or, if the coal consumption is maintained as before, the speed of the ship with the extra dead weight is increased from 0.25 to 0.5 knot according to the size and class of the ship.

THE GABET WIRELESSLY-CONTROLLED AUTOMATIC TORPEDO.

On Wednesday, June 23rd, experiments were made with the wirelessly-controlled torpedo of Gabet, to which reference has already been made in these

large cylinder terminating in two cones and forming the lower part of the apparatus. Some distance above, about 1.5 meters (5 feet), there is another similar cylinder, only smaller and intended to float. The lower shell is 9.5 meters long (31 feet).

The two tubes are fastened together by a series of very strong steel tube frames. Besides these two other shafts, rather large in diameter, start from the lower body, extend beyond the float, and form two rather short, vertical masts. Each one of these carries an acetylene light. They are connected by a copper wire.

Let us now examine the parts composing the lower shell, which is the most important. It is divided into several compartments, having each its particular use.

The first compartment is situated in the fore part of the lower shell. It contains the explosive charge and controls a warhead similar to the warheads of all present-day torpedoes, which produce the explosion of the charge instantly on contact with a hard body, such as the hull of a vessel.

While all ordinary torpedoes carry only 70 to 100 kilos of explosive (154 to 220 pounds), the Gabet can take 900 kilos (1,980 pounds) with correspondingly greater destructive effect.

The Gabet torpedo contains an internal-combustion motor operated by gasoline, a decided novelty. Compressed air as now used in torpedo motors may supply powerful engines, but the radius of action is very



Launching the improved Gabet wirelessly-controlled torpedo.



The wave-transmitting apparatus set up in a small boat.

THE GABET WIRELESSLY-CONTROLLED AUTOMATIC TORPEDO.

limited. The speed of torpedoes thus operated reaches 30 knots, or about 50 kilometers an hour.

It is manifestly very dangerous to shut in a gasoline motor in a confined space or nearly so, as is the case here, where communication with the outer atmosphere takes place only through the upper part of the foremast.

Ventilation is effected by means of a large blower, situated aft, between the motor and the chamber containing the storage batteries. The precautions taken seem sufficient to dispel all fear of serious accidents.

The motor is located in the compartment aft of the torpedo. It is therefore entirely separated from the explosive charge, with which it cannot communicate by any manner whatever.

The torpedo used for the present experiments develops 30 horse-power. It has a motor with eight cylinders arranged in V shape. But the compartment is large enough for a 300-horse-power multiple-cylinder motor, which is necessary to impart to the torpedo the estimated speed of 20 knots, or about 36 kilometers an hour.

Regarding weight, every necessary margin is allowed, since the torpedo can carry 1,800 kilos (3,960 pounds) of baliast under present conditions, that is to say, with a 30-horse-power motor. This baliast represents the difference between the weight of an electric motor with its storage batteries and the weight of the internal-combustion motor developing this power.

Gabet expects to attain a 10-knot speed with the 30-horse-power motor which he will use in his preliminary trials, before putting in the 200-horse-power motor, on which he relies to obtain the 20 knots that he considers sufficient speed.

Endeavors have been made to obtain for this dirigible torpedo all the advantages that could be had on a real vessel. In particular, it was sought to fit it with the means for maneuvering and altering the speed. This problem seems strangely difficult of solution. The trouble has been overcome by using a reversible screw, with which it is only necessary to turn the blades so as to diminish their effectiveness on the water: this promptly reduces the speed. By this means a propeller is obtained that acts as well moving forward as backward when given the same speed of rotation.

There was another great difficulty to surmount before this screw could be used. The power exacted from the motor varied considerably with the speed. It became necessary, therefore, to find a way of reducing the power developed by the motor and of providing against its running away as the resistance of the propeller tended to diminish.

To attain this end the spark is retarded as the speed of the torpedo is reduced. The motor speed is thus gradually changed by the variation of the pitch of the screw. This variation of pitch of the propeller has been availed of to act upon the timer of the motor.

For that purpose the pitch-controlling mechanism has been connected with the timer by a jointed rod, so that the spark advance is at its maximum when traveling full speed forward or backward. The pitch-controlling mechanism is also connected to the throttle valve, in order to simultaneously diminish, in certain proportions, the volume of gas admitted.

The third compartment of the torpedo contains a small storage battery. This is not intended to drive the torpedo, but to operate a relay that helps maneuver the boat under the influence of the Hertzian waves acting on special devices.

The compartment back of the explosive charge contains the Hertzian controlling instruments. They are sufficiently effective to act even at as great a distance as 8 to 10 kilometers (5 to 6 miles) from the transmitting station. 'This distance is a convenient one at the present time, for warships get into action at least at 7 or 8 kilometers (about 4 miles) away.

We have said that the two masts of the torpedo carried acetylene lights. These serve to show the position of the torpedo at every moment, and indicate clearly every change in its course.

It is absolutely necessary to know what is going on inside the torpedo and what influences may act upon it. For although the receiving instruments of the Hertzian waves have been made as perfect as possible, they may come under the influence of other waves than those sent from the transmitting station. In this case, the torpedo would obey other agencies and would deviate from its course.

To remedy this serious objection lanterns have been disposed about to flash signals in such a manner that the operator, placed on shore or on a ship, may recognize the nature of the directions received by the torpedo. In short, every time the torpedo receives waves registered by its instruments, the lanterns show signals to indicate the direction of the torpedo. If these signals lead the operator to believe that the waves come from the enemy, he does what is necessary to rectify the course of the torpedo, and he nullifies the disturbing waves.

We presume that the wireless control of the torpedo remains as we have previously described it. The

reader interested in that phase of the construction is referred to Scientific American Supplement No. 1650.

THE "ZEPPELIN III." AIRSHIP AND ITS TRIP TO BERLIN.

The large photographs of the latest Zeppelin dirigible reproduced on our frontispiece this week give an excellent idea of this new leviathan of the air, which made its first long-distance flight from Friedrichshafen to Berlin a little more than a month ago

to Berlin a little more than a month ago.

The start of this memorable journey occurred at 4:35 A. M. on August 27th. The airship started against a light northeast wind. Besides Engineer Durr and ng Count Zeppelin (the nephew of the inventor), only three mechanics were carried. The crew was reduced to but five men because of the uncertain weather and in order to reduce the weight carried as much as possible. The airship arrived at Ulm at 6:45 A. M., having made the 80 kilometers (49.7 miles) in two hours and eight minutes, at an average speed of about 23.3 miles an hour. This speed was maintained up to Heidenheim, a place located on the frontier of Wurtemburg and Bavaria, which was pa at 7:30 A. M. Soon after Gingen was reached. The airship remained here about an hour and described circles, while all the time it was fighting against the ontrary wind blowing from the direction of Wurtemburg. Soon after Engineer Durr sent a telegram stating that the airship would be forced to land at Nuremberg, on account of a cracked cylinder in one of the forward motors in the forward car. On account of this mishap, the speed was reduced considerably, the airship finally arriving at Ostheim, near Gunzensen, 21% miles from Nuremberg, at 11:45 A. M. this point a broken propeller-which was immediately replaced by an old one that was carried on board-made it necessary to land. Advantage was taken of the landing to renew the water ballast. After a delay hours, the airship started again at 2:10 P. M. Nuremberg, which was reached at 4:45 P. M. A landing was effected against a strong wind. Before landing the dirigible described several circles, in order to give the 120 soldiers of the Fourteenth infantry regiment time to make preparations for anchoring it. When the airship alighted, the crowd broke bounds, and it was feared that they would damage it. Fortunately, however, this fear was not realized.

The start from Nuremberg was made the following ay at 2:15 A. M. At 4 A. M. it passed above Bayreuth, where it was buffeted by the wind for three Engineer Durr dropped a card at 7 o'clo stating that all was well on board. At 8 o'clock the airship, still battling against the wind, returned Bayreuth. It then resumed its journey, but was able to make a mean speed of only 14 kilometers (8.7 miles) an hour. It passed Munchberg at 9:40, Hof at 10 o'clock, and Plauen at 12:10 P. M. It was making only 30 kilometers (18.64 miles) an hour. Werdau was passed at 1:45 P. M., and although the wind had completely died out, the speed of the airship grew less and less. It was hoped that it would reach Leipzig by 10 P. M., when another accident occurred. One of the blades of the propellers broke, and it was only with the greatest difficulty that the airship was able to reach Bitterfeld. It arrived at this place at 6:45 P. M., having been driven from Eilemburg by a single A successful landing was effected.

Repairs were made during the night, and the next orning at 7:30 A. M. the airship left Bitterfeld in a heavy fog. The fog dissipated rapidly, however, and when the airship arrived above the Tempelhof parade ground at Berlin at 12:30 P. M., the weather was clear. The Emperor and the other members of the royal family were on hand to receive Count Zeppelin, who had gone aboard his airship at Bitterfeld. Emperor William introduced him to Orville Wright, and this meeting of the two champions of the heavier-than-air lighter-than-air type of flying machine was decidedly novel. The landing of the airship occurred above the parade ground at Tegel, after it had first performed evolutions above the Tempelhof parade ground and afterward flown over the city of Berlin. One of our photographs shows the airship above the city, and the other shows it just before alighting.

The return voyage was started at 11:30 P. M. the same day. The airship followed the Wittenberg-Jueterbog rallway line for a considerable distance, It again met with another accident, due to the breaking of a propeller. The blade tore through the envelope of the airship, and punctured one of the balloons. The accident happened near Bulzig, about 60 miles from Berlin, and with the aid of some farmers, the airship was immediately brought to land in a field near the railroad track. The speed up to the time of the accident was extremely slow, and barely reached 20 kilometers (12.43 miles) an hour. Count Zeppelin not on board at the time of this accident, he having returned to Friedrichshafen by rail. The airship was obliged to remain at Bulzig for nearly three days. was not until 10:53 A. M. on the morning of September 5th that another start was made. Ulm was passed at 7:45 F. M., and Biberach at 8:25 P. M. The airship finally arrived at Friedrichshafen at 9:30 the following morning after a continuous voyage of 22 hours and 37 minutes. The average speed maintained from Bulzig therefore was only 14.3 miles per hour.

zig therefore was only 14.3 miles per hour.

After the "Zeppelin III." had been repaired, an effort was made to sail it to Hergentheim, 120 miles from Friedrichshafen, to take part in the maneuvers; but the repairs were not finished in time, and the airship was unable to reach its place until the maneuvers were over. Considerable excellent work was done, however, by the "Gross II." military dirigible at these maneuvers. This dirigible was able to reconnoiter from a great height and to send messages to the rear. Emperor William was greatly pleased at the work done by this airship at the maneuvers.

The "Zeppelin III." is the largest and most powerful airship which Count Zeppelin has yet built. It has two 150-horse-power motors, each of which drives, by means of belts, two two-bladed propellers. These are located one on each side of the airship about a third of the way up from the bottom. They are held upon brackets projecting out from the rigid frame. driving of the propellers by belts is a new arrange ment, as heretofore they have been driven by shafts and bevel gears. The stabilizing fins near the rear end are somewhat different from before, there being two upon each side placed above the center horizontal line of the airship. The up and down steering is accomplished by quadruple horizontal rudders on each side of the airship at the front and at the rear. sides this, water ballast is carried in a long tank connecting the two cars.

It is planned to use this airship for carrying passengers in different cities in Germany in the near future.

The Current Supplement.

The opening article of the current Supplement, No. 1761, discusses the San Salvatore mountain railway of Italy. Beautiful views of this picturesque road are The classification of chemical elements, in the light of Mendelejeff's great generalization, and in the light of the electronic theory, is considered by Prof. H. E. Armstrong in a thoughtful paper. A critical résumé of Prof. Wood's experiments with rotating liquids used as mirrors is presented. A perpetual clock is described by Charles E. Benham. new system for the electrical transmission of pictures is described by Dr. Robert Schoenhoefer. Prof. Albert F. Ganz's paper on recent electrical progress in the artificial lighting field is concluded. The great rise which is announced in the price of India rubber tires directs attention once more to the various and con-flicting problems presented by the wheels of motor These are critically considered. Prof. William H. Pickering presents his view of the origin of meteorites, and advances the theory that meteorites are of terrestrial origin. The disappearance of the Bosgoslav Islands is described. Sir Norman Lockyer, the wellknown English astronomer, has made a special study of the astronomical value of ancient temples. esult of his researches is presented in an article entitled "The Uses and Dates of Ancient Temples.

The Death of Robert Hoe,

Robert Hoe, senior member of the well-known firm of R. Hoe & Co., printing-press manufacturers, of New York city, died in London on September 22nd, at the age of seventy. Mr. Hoe was for years the head and front of the extensive business founded by Robert Hoe in 1803. His devotion to the enormous enterprise with which his name was connected, was exhibited not only in an administrative capacity, but also in the suggestion of many improvements in printing presses. His invention of the rotary multi-color and half-tone web presses, now found in every newspaper and job printing plant, is perhaps his most important contribution to the printing art. Mr. Hoe was the author of several books, most of them dealing with printing. Among them is a history of the development of the printing press from the time of Gutenberg down to the present day.

The railway from the Piræus to the Turkish frontier (246 miles) may be said to be practically completed, the section from Bralo to Larissa having been opened to traffic since October last, and trains now run in twelve hours from Athens to Larissa. The construction of the final section of 28 miles to the frontier is in an advanced state. There remains, then, in order to release Greece from the isolation which she is the last of European States to suffer, but 70 miles between the frontier and the nearest station on the Ottoman railway system. There appears no indication, however, of any disposition on the part of the Ottoman government to facilitate the construction of the junction line, and it will be regrettable if the reformed government of Turkey continues to oppose a project so evidently appertaining to an era of civilization and progress.

11.

n

ar

11

d

Scientific American

On Waterproofing Concrete,

On account of the number of inquiries received from correspondents as to methods of waterproofing cement blocks or monolithic concrete, the Scientific American has been investigating what is being done in the way of improvement of existing methods.

The Concrete Association of America has conducted a valuable series of experiments and distributes its findings free of charge in a public-spirited manner, but the results obtained are largely negative,
Some preparations are found to be effective under

certain conditions, but none hitherto has been found to be equally reliable with all mixtures and under all

The need and requirements of external paint for concrete, if only to counteract the variable porosity which cannot be avoided unless the personal equation in concrete mixing is eliminated, is so well put in a naner read before the recent convention of the American Society for Testing Materials, by Mr. G. D. White, that we quote a part of it by permission.

Unless extreme care is exercised in the preparation, mixing, and workmanship of concrete for solid or reinforced work, which is not always commercially possi ble, the resultant concrete is not impermeable, or at least not uniformly impermeable to water or moisture. Where perfect materials have been used with perfect workmanship, we have another difficulty, another problem to solve. Concrete is a non-conductor of heat. It is, naturally, a cold-blooded animal. The difference in temperature between the concrete wall and the atmosphere (the warmer the day the greater the difference in temperature) causes a condensation of mois-ture on the surface. This is annoying, and a detriment to health in living and office rooms; a loss of room or loss by damage in storerooms and wareouses; an objection in any building, no matter what its nature or purpose

"Hollow concrete blocks, tiles, brick, etc., have various defects. They are not only porous but capillary positive, and thus absorb moisture from 5 to 40 per cent of their own weight. Due to rain and snow, walls built of these materials become water-soaked, and remain soaked for varying lengths of time. During certain seasons of the year, and especially in some

tions of our country, they remain soaked for months. "The fact that dry walls are essential to health and comfort is generally known, and so well appreciated that the question of dampness has been a restraining agent to a much larger and more extensive use of con-crete by the building trades of this and other coun-

"The tendency to stain, the frequence of efflore e, and difference in color due to difference in materials and to intermissions in concrete, are defects of erious nature.

"A drawback that includes concrete in all forms Replac is the uninviting, unattractive color. buildings of marble, of terra cotta, of granite, of wood handsomely decorated, with buildings of concrete, and note the contrast. The dirty gray of ordinary cement or concrete becomes monotonous to the observer even where there is but a sprinkling of concrete among buildings of more pleasing construction

"If to the strength, cheapness, durability, and fire-resisting properties of concrete can be added impermeability to moisture and decoration, we will have a building material as nearly perfect as the world ever seen, and this within the means of every builder.
"In recognition of this fact, various concerns and

individuals have placed on the market and recommend as a solution to the problem, various treatments and

"For the sake of convenience, I will divide these into four classes. In my investigation of the various treatments and materials included in these classes have endeavored to be unprejudiced, and to give to each its true worth and full value.

I. WATERPROOFING COMPOUNDS IN LIQUID OR POWDERED FORM MEYED WITH THE CONCRETE IN ITS PREPARATION

"This is a help in that it lessens and retards, in a sure, the moisture-absorbing tendency of concrete. It fails in the desired attainment for the following

Improper distribution, which is difficult of regu-

"When properly distributed, it does not render concrete entirely impervious to moisture

"It has a tendency to weaken the tensile strength

"It does not decorate.

The increase in value is not proportionate with the increase in cost.

deteriorates with age, that is, a concrete blo containing the waterproofing compound, on the first application of water will absorb certain varying quan-On subsequent applications, allowing the block to dry in each instance, larger quantities are absorbed.

TREATMENTS PREPARATORY TO THE USE OF LINSEED

Treatments in various forms have been advanced and recommended by some of our leading master painters, and indorsed by most able research chemists. For the sake of brevity, I have included in my paper but three of these treatments

"(a) Hydrochloric or muriatic-acid wash

A wash consisting of a solution of zinc sulphate and water.

A wash consisting of ammonium carbonate and water.

From a chemical standpoint, muriatic acid, no matter in what strength, nor what the character of the concrete, is not only useless as a remedy, but detrimental in its action. Master painters who have endeavored to put it in practice have discovered to their sorrow a confirmation or a demonstration of the chemical theory.

"Theory favors and practical tests confirm as the best adapted to the purpose, the former of the two lat-

The author proceeds to give the chemical reactions of these various washes with the concrete ingredients, and shows in a convincing manner the reasons why fail in their desired object. He adds:

"The treatment with zinc sulphate or ammonium carbonate, even though successful, does not offer a solution to the problem, because a linseed-oil paint is unsuited for either exterior or interior painting of concrete. The gloss robs the surface of the appearance of stone or masonry. Linseed oil has water-absorbing and lacks water-resisting properties. It can not be applied over a damp or wet surface, which means that following a rainstorm or rainy season, a painter must wait weeks and perhaps months before e can commence work on or complete a contract already begun.

COLOBLESS LIQUID COATINGS.

"Certain of these may be of some value or service retarding moisture absorption and efflorescence, but they are all alike found lacking in the following

"They serve to emphasize any defects in, or differin color of, concrete construction.

"They impart to concrete a soggy, water-soaked ap-

"They do not render impermeable to moisture for length of time.

"They do not decorate."

Under his fourth heading Mr. White summarize paints for concrete, with the practical conclusion that there are none which fulfill all the requirements of a evere list which he gives. The principal of these are that it must be applicable to a wet surface and at the same time waterproof when set: it must be applicable to the concrete without previous treatment of the latter, durable, economical, and pleasing to the eye, must act as a bond between concrete and a plaster coat, and remain hard in the presence of water, in addition to possessing all the qualifications of ordinery paint such as working well under the brush, filling voids at d leveling up irregularities of surface.

Although Mr. White did not say in his paper that he knew of any satisfactory paint, we have reason believe that he has been instrumental in the produc-tion of one, or at least that it has been developed with a special view to fulfilling the requirements of lined in his paper.

We have recently seen tests, and the results of lcng-continued tests, of a paint cailed Cementhide, seems to fulfill all the exacting conditions above referred to.

At a cement-block factory in Newark, N. J., a part of the process consists of the curing of the newlymade blocks by subjecting them to steam for thirtysix hours, accelerating their setting and providing a much more constant and uniform supply of moisture to the cement than can be obtained by spraying.

For this purpose two curing rooms are used, of which is opened to be emptied and refilled on alternate days, the steam being turned off in the morning and on again at night. The steam is therefore continuously applied to the interior of the walls for 36 hours out of every 48. The rooms themselves are built of concrete blocks, and were formerly constantly saturated with moisture. It was evident from the outside which room was filled with steam from a thin film of moisture trickling down the exterior of the walls, which had to be drained away. Six months ago the interior was painted with two coats of Cem hide, and now there is no evidence of moisture on the outside of the walls, while the interior has a hard surface differing little from that of well-finished cement except in its pleasant color.

Blocks made as identically as possible from one batch of concrete have been tested under varying conone plain and the other painted. painted block was found to vary in weight with the water, absorbing it according to the amount pres in the atmosphere or from the ground, while the weight of the painted block varied not at all. Blocks painted in a variety of pleasing colors have been left exposed to sun, rain, and wind for months without being apparently affected. Concrete painted with this material takes a plaster coat better than natural con-

crete, both concrete and plaster adhering to the paint more firmly than they do to each other. It has ever been shown that the rise of moisture by capillarity in monolithic concrete set in moist ground is stopped by a coat of Cementhide between the top of the underground concrete and the masonry or other concrete continuation upward of the wall. The paint has a dull finish not unlike the concrete itself, but smoother and of any color desired, and appears to remain hard and to preserve the surface of the concrete indefinitely. One cannot imagine a more severe test in any ordinary building than that imposed at the block factory above mentioned, and it would seem that this paint should have widespread possibilities when it is sufficiently introduced on the market.

THE MODERN ICARUS.

Tradition asserts that the first to sacrifice himself to the problem of flying was Wang Tu, a Chinese mandarin of about 2,000 years B. C. who, having had constructed a pair of large, parallel and borizontal kites, seated himself in a chair fixed between them forty-seven attendants each with a candle ignited forty-seven rockets placed beneath the appar-But the rocket under the chair exploded. the mandarin and so angered the Emperor that he ordered a severe paddling for Wang.

Then there is left in stone a partial account of ex-periments by Man-U, an Assyrian priest who attempted to fly from the temple of Baal. The next victims of aviation whom we find are certain criminals whose arms and legs the ancient Leucadians annually fitted wings of various design and who were then hurled from the "Rock of Sappho's Leap," a boat awaiting them in the sea below to give them liberty should

they succeed in solving the problem.

The first fatality of the kind in our era s have been a Roman who during the reign of Nero at-tempted to fly high in the air over the Eternal City. During the Dark Ages one Dante while trying to fly with a pair of wings, at Perouse, fell upon the top of St. Mary's Church and broke his leg. The Prior of Tongland in 1510, before the Court of Stirling donned wings and, leaping from a tower castle, fell into the "mydding" (dunghill). Allard, a tight-rope performer, was crippled by a fall while try-Allard, a ing to fly before Louis the Grand, at Paris, about 1860.

nus far all such accidents were results of attempted aviation, for the balloon was not invented until 1783. hen this new vehicle of the air met with an acc in Philadelphia during some experiments by Ritten-house and Hopkins who, after sending up dogs and cats in a cage carried by a captive bunch of 47 hydro-gen balloons, persuaded James Wilcox, a carpenter, to trust himself in the cage. After floating over the city he found himself drifting toward the Schuylkill River and, becoming terrified lest he should descend into it, punctured some of the balloons. Coming to earth

with a thump he broke his wrist.

The next victims, Pilatre de Rozier and M. Romain, set out from Boulogne in 1785 in a car supported by a fire balloon underneath a hydrogen balloon with which compound arrangement they expected to cross the Eng lish Channel. In a quarter hour, when at a height of 3,000 feet, the apparatus took fire and the scattered fragments were found upon the seashore along with awfully mangled bodies of the aeronauts. Olivari, ascending from Orleans, in November, 1802, also met death by his balloon catching fire.

In April. 1808. M. Mosment ascended at Lisle wayflag decorated with the imperial eagle of Fran and the assembled spectators shouted with delight. He dropped an animal attached to a parachute and it came safely to the ground. Later a murmur of horror olled over the crowd which learned that in one of the ditches outside the city M. Mosment had been found, lifeless and covered with blood. The same day the

balloon came down seventy miles away.
In July, four years later, the corpse of Bittorff, after his balloon had caught fire, was found stiff and cold upon the roof of a house outside Mannheim. Shortly afterward Count François Zambeccari tried, like Rozfer and Romain, to combine the fire and gas balloon but after adding flame to powder he crashed down from the heavens, his body, charred and mutilated, being picked up near Boulogne.

Mme. Sophie Blanchard, widow of a French aeronaut, made an ascent July, 1819, in the presence of a vast crowd, from the Tivoli Garden, Paris, setting off fire-Suddenly a great flash was seen above her basket and the crowd, thinking this to a part of the display, shouted: "Bravo!" But the But the Her basket caught against the projection of a roof and spilled her out upon the pavement, where she was picked up dead.

The first military martyr was Lieut. Harris, of the British navy, who, in May, 1824, while studying the strategic value of balloom attached to warships was dashed to earth and killed by the breaking of a valve in his balloon. And in September of the same year, When John Wise, greatest of all American balloonists, abandoned his muslin balloon, in 1836, for the "Meteor," wrought of silk, he went up in it from Lancaster, Pa., on a showery day in May. He sailed to the southward and was soon lost in a big black cloud. That night he descended near Port Deposit, Md., and, mooring his balloon near a farmhouse, aroused the family. It was drizzling and he was discharging the gas from the upper valve when someone brought a light, exploding the gas in the heavy atmosphere. Wise was thrown back ten feet, severely scorched, and some of those gathered round were badly burned. Wise was taken to Philadelphia, where he recovered.

In July, 1837, an immense crowd gathered in Vauxbail Gardens, London, to see an aged savant, Robert Cocking, test his new parachute. It was of Irish linen, had a circumference of 107 feet and was fastened below the basket of a balloon, wherein two aeronauts were stationed. Mr. Cocking got into the smaller basket of the parachute and the big balloon, after taking him slowly up, drifted gracefully away. But a rider following on horseback, arrived at a field near Lee, in Kent, just in time to find the dead body of Cocking, who had fallen through the air a mile in the collapsed parachute.

Another victim of the parachute was Leturr, killed in 1854 while attempting a descent, and soon afterward Arban, of France, while rising in a balloon from Barcelona was blown into the Mediterranean and lost. Then in 1850 Gale made a fatal flight, while in 1863 Chambers was suffocated by balloon gas, in England.

In 1873 at Ionia, Mich., the populace cheered as the brave aeronaut. Mountain, rose from their midst in his big balloon. He floated gaily aloft at first but suddenly the fastenings of his basket gave way and he fell from such a height that his body penetrated the earth for some distance.

And next came the first recorded fatality from winged flight since the Dark Ages. Vincent de Groof, renowned as the "flying man," while giving an exhibition at London, in July, 1874, fell suddenly to earth where his corpse was picked up with the stilled wings attached.

In 1875 J. Croce-Spinelli and Spivel, two French savants, while attempting to break the record for altitude in their balloon "Zenith" rose so high above France that the intense cold deprived them of power to descend. When the "Zenith" came down they were found frozen to death in the basket. During the sleep of Paris two balloons with escaping passengers drifted off to sea never to be heard of, and in 1888 the corpse of Simmons, who had ascended from Olympia, came to earth near Malden.

Hiram Maxim, a few years later, spent \$100,000 on two immense heavier-than-air flying machines, the last—which weighed 8,000 pounds—making a false start, in July, 1894, when the machine ran off the guard rails.

Maxim gave up in disgust and turned to other problems.

Then, in 1896, Otto Lilienthal, of Berlin, after a quarter century of tedious experimenting, brought forth a double-decked aeroplane in which he soared through the air at race-horse speed, sixty or seventy feet above ground. Prof. Robert W. Wood, of Johns Hopkins University, went over to Berlin to test the apparatus and made the snapshot used herewith. A few days after this picture was taken Lilienthal fell from the same apparatus, in the same spot, and was picked up dead. Shortly afterward the experimenter Pilcher, who had been continuing Lilienthal's methods in England, met death in much the same way.


The same year S. A. Andree of Sweden, accompanied by Nils Strindberg and Dr. Eckholm, two other adventurous Swedes, started in his balloon from Spitzbergen in search of the North Pole, and no trace of them has since here found.

them has since been found.

In 1896 the hope of science was renewed by Langley, our great astronomer and physicist, who after a decade of the most careful experimentation, flew a steam aerodrome three quarters of a mile over the Potomac. This not being large enough to carry its engineer the army allowed the inventor \$50,000 with which to perfect a man-carrying machine. The quarter-size model of the latter also steamed successfully over the Potomac in the face of the wind; but when the full-size aerodrome was about to leave the launching track a defective part of the launching apparatus caught it and precipitated it—engineer and all—into the water. Although the big aerodrome never had a chance to try its wings, the press so ridiculed the enterprise that appropriation for repair was refused and Langley, despite his other great contributions to science, died a disappointed man.

Count Zeppelin's new craft, 443 feet long, was making a long official test splendidly in August, 1908, when the balloon caught fire.

And finally comes Orville Wright, riding to victory in his heavier-than-air machine, which is scarcely inside the goal when it dumps him out with a broken thigh and several fractured ribs; and with him spills

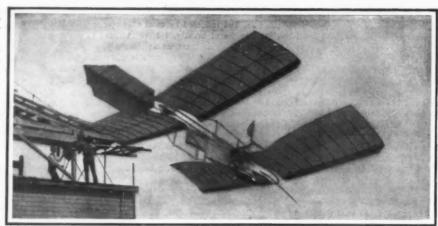


False start of Langley "aerodrome," 1908.




John Wise.



Lieut Thomas E. Selfridge.




Towing wreck of Langley "aerodrome" back to houseboat, 1903.



Lefebvre's machine after the accident.



Lefebvre, who was killed in France.






Otto Lilienthal In his



l fu hin

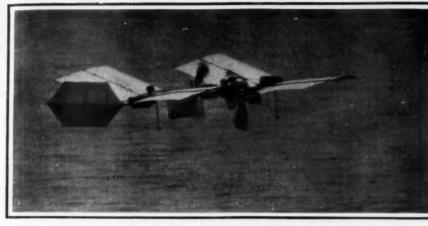

Langley's last model. Telephoto snapshot of it in flight




Samuel Pierpont Langley.



Copyright 1908 by Waldon Fawcett Orville Wright.




Langley aeroplane in the Potomac River.



Sir Hiram Maxim.



Captain Ferber.



Ferber's aeroplane No. IX.

to earth young Lieut. Selfridge, whom soldiers solemnly bear on a litter to the military hospital where occurs, three hours later, one of the more recent of the many fatalities of our chronicle of tragedy.

The two fatal accidents which have occurred in

France with the motor-driven aeroplane within the last few weeks, have further dampened the enthusiasm of many would-be aviators. The first of these, which happened on September 7th, resulted in The first of the death almost instantly of Lefebvre, who was of the newest and probably the most daring of all the French aviators. The second one, which occurred only last week (September 22nd), snuffed out the life Capt. Ferber, who was probably the best-known theorist and practician in the art of aviation in France. Both of these accidents occurred while the men were trying out new machines. In the case of Lefebvre, he was making his first flight with a new Wright biplane. The machine rose in the air without difficulty, and flew for some distance in a straight line. Lefebvre made an excellent turn, and was flying back again in a straight line when suddenly the machine dived to the ground, striking its head on with terrific force The motor fell upon the aviator, who was crushed and had his skull fractured.

Capt. Ferber, on the other hand, was experimenting with a new Voisin aeroplane. He had flown half a mile at a height of about 25 feet and was making a turn when the machine tipped a great deal, and also dropped on the turn, so that the end of the lower plane struck the ground. The machine reared on its nose, and Ferber was thrown to the ground, the motor falling upon him. He managed to extricate himself, and was able to walk to the grandstand with the aid of some spectators. He said that he had flown too low, and that he had been bothered by the wind in making the turn. He was not seriously injured to all appearances, but in a few minutes a hemorrhage set in, and he died before a doctor arrived. The machine was badly damaged, and it was a wonder that the aviator was not instantly killed. Capt. Ferber probably did more than any other man to bring the art of aviation to its present advanced point. He was much of a theorist, and only lately he published an article in which he deplored the weight of the present-day machines, and gave it as his opinion that no progress had been made in perfecting these during the past six months. The fatal accident, which occurred at Boulogne, was preceded by another bad smash less than a week before. In this instance the machine broke a rudder and one of the planes.

Rate of Helium Production.

In a recent issue of Nature Mr. R. J. Strutt contributes a communication on "Rate of Helium Production from the Complete Series of Uranium Products."

A knowledge of this constant is essential to the esti-

A knowledge of this constant is essential to the estimation of the ages of minerals from their helium content. In a paper published in Proc. Roy. Soc., July 28th, 1908, Mr. Strutt gives the ages of some minerals provisionally on the assumption that the rate was 9.13 × 10-3 cubic centimeters per gramme U₂O₅ per annum. This rate was calculated from Rutherford's indirect data. It has received much support from Sir J. Dewar's determination of the rate of production by radium with its immediate products. Mr. Strutt is now in a position to confirm it further by an experiment on the rate of growth of helium in a solution of pitchblende. He speaks of a solution, but it has been found impracticable to take up all the constituents by one solvent. Two solutions were necessary.

The pitchblende solutions contained 115 grammes of U_aO_a , and yielded in sixty-one days a quantity of helium, which was measured as 2×10^{-6} cubic centimeters in the capillary of a McLeod gage. This gives the rate as 10.4×10^{-8} cubic centimeters per gramme U_aO_b , per annum. No stress can be laid on the close agreement with Rutherford's estimate in view of the very small gas volume measured. The experiment proves, however, that that estimate is of the right order of magnitude. Larger scale experiments are in progress, and these, in conjunction with similar experiments on thorianite, will, it is hoped, enable data on the quantity of helium in minerals to be translated into estimates of time with full confidence.

Railway Tree Planting.

The Pennsylvania Railway is planning to set out more than 1,000,000 trees. This will make a total of 3,430,000 trees planted in the last three years to provide for some of the company's future requirements in timber and sleepers. This constitutes the largest forestry plan yet undertaken by any private corporation. Heretofore the company's forestry operations have been confined to a limited area between Philadelphia and Altoona. This year, however, 65,000 trees are being set out on tracts of land near Metuchen and New Brunswick, N. J. In addition there are to be planted within the next month 207,000 trees near Conewago, Pa., 186,000 in the vicinity of Van Dyke, 334,000 at Lewistown Junction, 7,000 at Pomeroy, and 205,000 at Denholm.

THE HEAVENS IN OCTOBER



HAT astronomical problem has so much before the public during the past month as this: How can a man determine when he is at the north

As many incomplete or mis leading answers have come to the writer's notice, it may be

brief review of the matter appropriate to give a

An observer standing at the earth's north pole would have the celestial pole (not the pole star, which is 1¼ deg. distant) in his zenith. The stars, during the long night, would appear to circle round the sky from left to right always at the same altitude above the horizon; the sun to circle similarly, rising slowly from the horizon to its maximum altitude of 231/2 deg between March and June, and sinking again until its disappearance in September. The change in the sun's altitude from day to day (which equals that in its declination) is accurately known, and can be taken from a small and easily portable table.

For an observer near but not at the pole, the celes-

pole would be displaced from his zenithoward that point of the horizon where the earth's pole lay-by one degree for every 60 nautical miles The starsdistance. or the sun after allowance is made for its change of declination-would still appear to circle round the heavens, but would lowest when due northi. e., toward the pole-and when due south The whole change in their altitude would equal twice observer's distance from the pole. tudes up to 80 deg. more (that is, more five or six hundred miles from the pole) this change in altitude is very con spicuous, and observations can easily be made when the sun is highest (at local noon) in the manner familiar to mariners. But for an observer within a few miles of the pole, these changes in altitude would no longer be perceptible to the eye, and it would not be obvious in which direction the pole really was. To make quite sure, it would be necessary to observe the sun's altitude at intervals during the day, and also its compass bearing. (The compass, of course, which points toward the earth's magnetic pole, 2,000 miles away, would be as good a guide there as here, but of no service at all in finding the geographical pole.) It would then be

ary to march toward that compass bearing in which the sun had the lowest altitude (corrected of course for changes in declination). The distance to the pole in sea miles would be half the difference of the greatest and least altitude in minutes of arc; that it would then be easy to advance to the right -in theory at least!

This discussion tacitly assumes that the observer is on firm land. On the drifting polar ice, the change in his position during the day would complicate mat-ters. But by making observations for a second day, the amount and direction of the drift could be determined: for the sun's altitude (still corrected for of declination) would be greater in the direction of the drift, and less in the opposite direction than on the previous day, by the amount of the drift The explorer would then have all the information essary for his purpose.

One other point may be mentioned. The sun's altitude must of course always be corrected for refraction in the usual way. But since the sun's altitude is practically the same all day long, the refraction will be constant (except changes due to weather condi-tions, which would probably be very small). The ob-server's position and drift, which are determined from differences of the observed altitudes, will therefore be practically independent of the refraction corrections

and also of any "constant errors" of the instrument.

If the conditions of observation were as good as regards temperature and comfort as lower latitudes, an observer of moderate capacity, with portable instruments (sextant artificial horizon, and chronometer) be able from two days' observations to find both his position and rate of drift with an uncer tainty of only a few hundred feet. Under the actual conditions at the north pole, everything would depend on the experience and skill of the observer; but in any case, he could fix his position with an error which would be quite imperceptible on even the largest-scale maps of the polar regions.

THE HEAVENS

Our map shows the aspect of the evening skies; and shows, too, at a glance how dull the southern and eastern skies would be, were not Mars and Saturn there to brighten them.

The most prominent constellation there is Pegasus which lies high up, south and east of the zenith. It may be instantly recognized by the Great Square—about 15 deg. on a side, composed of second-magnitude stars, and standing decidedly alone-which is one of the principal landmarks of the sky for the beginner, as it has no counterpart in the heavens. One of its the map. The whole constellation extends over more than 40 deg. and is one of the largest, though not the most conspicuous, in the sky. stellations are the dullest of the zodiacal ones—Capri-cornus, Aquarius, and Pisces. The second of these, however, now contains the splendid Mars, and the last the less brilliant but still conspicuous Saturn, which both far outshine any stars within a long dis-

The line of stars running to the left from Pegasus beginning at the northeast corner of the great square, contains the principal stars of Andromeda. Above the middle one of the three, near the second of two small stars, is the Great Nebula, the brightest in the heavconcerning whose constellation, and the problems which it still presents, we spoke a few months ago.

Below this is the inconspicuous but ancient group of Triangulum, and the smaller and brighter one of Aries. The Pleiades are visible north of east, and Aldebaran is just rising.

Auriga in the northeast is a little higher up. Above it, in the Milky Way, we come in succession to Perseus, Cassiopeia, and Cepheus; then passing the zenith, to Cygnus, Aquila, and Sagittarius (just setting). Ophiuchus and Serpens are also disappearing, due west. A little to the right is the Northern Crown

with the "keystone" Hercules above it, and the steel-blue Vega still high-The Great Bear swings low on the northern horizon, and the Little Bear, enfolded by the Dragon is higher up.

THE PLANETS, Mercury is evening star until the 12th, when he passes on this side of the sun, and becomes a morn ing star. He reaches his greatest elongation west of the sun on the 27th, about which date he rises a little before 5 A. M., and easily visible before day break: being situated in Virgo, a few degrees above the bright star Spica, which however is not as bright as he is.

Venus is evening star, and is very bright, but not very conspicuous, be cause she is so far south. month she During the passes from Libra through Scorpio into Sagittarius, and at its end she is 26 deg. south of the celestial equator. In one latitude she sets a little after 7 P. M.; but for observers in the southern hemisphere she remains in sight three hours longer, and is remarkably prominent.

Mars is on the borders Aquarius and Pisces rising before sunset, and visible almost the whole night. He moves westward among the stars, ever slower and slower, until the 26th, when he begins the eastward march. which will take him over

more than a whole round of the zodiac before another opposition.


Jupiter is morning star in Virgo, rising about 5:15 A. M. on the 1st, and 3:40 on the 31st; that is, about an hour earlier than Mercury at the time the latter is best seen.

Saturn is in opposition on the 13th, and is well observable all through the month. His wings are by this time pretty widely opened out, and he is a very beautiful telescopic object.

Uranus is in quadrature, east of the sun, on the 10th, and south at 6 P. M. Neptune, in almost the opposite quarter of the sky, is in quadrature, west of the sun, on the 13th, and crosses the meridian at 6 A. M.

THE MOON

The moon is nearest us on the 27th, and farthest off She is in conjunction with Neptune on the 13th. the 6th, Jupiter on the 12th, Mercury on the 13th, Venus on the 17th, Uranus on the 21st, Mars on the 26th (early in the morning), and Saturn on the 27th. On the evening of the 20th she occults the bright star Sigma Sagittarii (in the Milk Dipper). As seen from Washington, the star disappears behind the moon's dark limb at 7:01 P. M. and reappears on the bright side exactly at 8 o'clock.

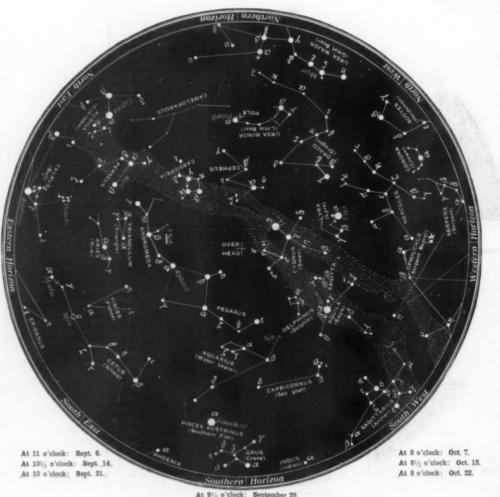

NICHT SKY: SEPTEMBER AND OCTOBER

four corners now belongs to Andromeda; but it was case grouped with the other three, and evidence of this still remains, for the letter Delta, which it bore as a member of the constellation, is now lacking from the list of the stars of Pegasus. The rest of the con stellation, extending westward from the Great Square, contains some remarkable double stars (observable only with great telescopes), but nothing to detain us. Our initial letter shows how this constellation, large as it is, is supposed to represent but a part of the inged steed of classic mythology. Any actual resemblance would indeed be difficult to trace


The western edge of the square, continued far southward, points out the isolated bright star Fomalhaut. The remaining stars of the Southern Fish, though too faint to be shown on the map, are easily visible of clear night, forming a horizontal line just below the

The equally lonely star some distance east of Fomalhaut is Beta Ceti. The rest of the constellation follows this to the eastward. First comes a quadrilateral, of which the southernmost star r is one of our nearest neighbors. Then comes the notable variable Mira-also not far from us in space, and now brightening up, and visible to the naked eye; and lastly a group, only the brightest two of which appear on



SELF-CLEANING ASHPANS FOR LOCOMOTIVES.

patent has been recently granted on an ashpan for locomotives, which is provided with novel means for cleaning out the ashes. Our illustration shows a



SELF-CLEANING ASHPANS FOR LOCOMOTIVES

locomotive ashpan fitted with the improved apparatus, and partly broken away to show the details. in reality, two ashpans, one placed before the other, and each provided with hoes attached to a piston, which may be operated to hoe the ashes out of the pans. The forward pan is provided with two hoes, and B, while the rear pan has but one, C. Between the two ashpans is a cylinder, D, which is fed with steam through two pipes E, that enter at opposite ends of the cylinder. The piston in the cylinder is provided with a rod F at each end, to which the hoes are attached. The cylinder D is supported between the pans by means of a pair of brackets G. The forward end of each pan is provided with an outlet, normally closed by a damper. The rear of each pan is also provided with an opening, through which the ashes may be discharged, and the rear ends of the hoes B and C are of such form as to enter and close these openings when they are forced back to the position shown in the illustration. When the hoes are moved forward, the dampers above referred to are opened by means of forwardly-projecting blades on the hoes A and C. bottom plate of the forward ashpan is also provided with a discharge opening, which is intermittently opened and closed as the hoe A passes over it. The steam pipe E leads up to a three-way valve, located at the boiler head in a convenient position for operaby either the engineer or the fireman, who may by this means reciprocate the hoes in the ashpan, and cause the discharge of the ashes. The inventor of this improved locomotive ashpan is Mr. James S. Downing of 185 Cooper Street, Atlanta, Ga.

SANITARY REFUSE RECEPTACLE

The ordinary refuse receptacles used in public places are merely open cans in which garbage, ashes, or other waste material is placed. The fact that these cans are open is a serious objection, because it permits the breeding of germs which may be infectious. Furthermore, it is a temptation to throw lighted matches or cigar or cigarette stumps into the can, and set fire to the contents. To obviate these difficulties, a new type of refuse receptacle has recently been devised, which is illustrated in the accompanying engraving. the accompanying engraving. It is so arranged that the opening through which the refuse is introduced automatically closes; and in addition to this, the can is provided with a receiver for disinfecting material, which will keep the contents in nearly a sanitary condition as possible. Fig.

il

ig

shows the receptacle closed. The top or lid of the receptacle may be swung open, as indicated in Fig. to permit of dumping the contents of the can. cup of disinfecting material will be observed at the center of this lid. Fig. 3 shows the receptacle, with the inlet door open to permit of introducing refuse. A spring is attached to the door at the inside, and serves to draw the door shut as soon as it is re-When the top of the can is open, as in Fig. 2. the lid is fastened to a catch at the front of the receptacle, and this prevents the inlet door from being swung open while the receptacle is being inverted to remove the contents. The inventor of this refuse receptacle is Mr. Vincent Azzara, 24

Washington Street, Morristown, N. J.

CONVENIENT ROOK HOLDER

Pictured in the accompanying engraving is a holder for magazines and other books, de-signed to hold the book open at any desired point and support the book at each side. The cover supports of the holder are adjustable to support the book either fully open or closed, or to support the separated portions of the book in an intermediate position. The con struction of the device is shown in the fragmentary detail view. It consists of a spring clip or gripping device A, in the form of a relatively long trough-like member of sheet metal, which grips the bound edge of the maga

zine or book. Within the clip is a tube B, which extends beyond the ends of the clip A. At the upper end of the tube B a plug is fitted to snugly engage a rod C. This rod is provided with snugly engage a rod C. This rod is provided with a head at the lower end, as shown in the detail view, which is adapted to contact with the inner end of the plug, and prevent the rod from being withdrawn entirely from the tube B. The rod C is The rod C is bent upon itself into a U form, while the outer extremity is turned up to prevent it from digging into the The cover supports D consist of wire wings




CONVENIENT BOOK HOLDER,

hinged to the extremities of the tube B. A wire clip is bent over the hinged ends of the wings, and acts as a stop to prevent them from being opened too far. In application the clip A is passed endwise over the bound edge of the book, and the wings are slightly separated to admit the book between them. The book is opened to the desired point, moving the wings outwardly on their hinges, and then the rod \mathcal{C} is withdrawn from its tube, to the position shown by dotted lines slipped over the open book, and pressed back to its normal position, as indicated by full lines. In this position the two portions of the book are pressed against the wings, and the book may be conveniently held with one hand. by grasping the clip A, which serves as a handle. The hinges of the wings are sufficiently stiff to hold them in any position in which they are set. Mr. Albert F. Stone, Jr., of Callahan, Cal., is the

inventor of this improved book holder.

IMPROVED CUTTER HEAD.

The cutter head which is illustrated in the accompanying engraving is so designed that the cutting tools may be readily attached or detached at will, and may be adjusted as desired, without removing them from the cutter head. The body of the device, which is indicated at A, consists of a cylindrical having substantially the barrel form of a cup, with a flange formed thereon. The driving spindle is adapted to enter the barrel, and the cutter head is adjusted thereon by turning the end screw. A set screw C serves to hold the cutter head to the shaft. A series of conical apertures D are formed in the flange. They are adapted to receive the split nuts E, through which the screws F are threaded. The screws F are prevented from turning by means of set screws G, which enter keyways therein; but by means of nuts on the end of the screws, the conical nuts E may be snugly seated in the openings D. The upper end of each



IMPROVED CUTTER HEAD.


screw F is provided with a tool holder H. adapted to receive a tool or bit I, which is held in place by means of a set screw J. Each conical nut is formed with teeth at its outer end adapted to engage a pinion K on the end of the key L. By inserting this key through the apertures from the rear of the cutter, the bits may be adjusted at will, without removing the cutter head, and then the screws F are made fast by tightening up the nuts at the rear. The bits may be cut from air-hardening steel of any shape. The inventor of this cutter head is Mr. John F. Stedman of Newberg, Ore.

RAIL FASTENER.

The usual method of fastening a rail to the ties, has this disadvantage, that the base flange of the rail acts like the claws of a hammer under a nail head, to pry the spike out of the wood. A better construction m to be one in which the axis of the spike lay at right angles to the pull of the rail base. With a view to providing such a construction, a new type of rail fastener has just been invented, which is shown in the accompanying engraving. The fasteners may be applied or removed without the use of a hammer, and are adjustable to compensate for shrinkage in the ties. Fig. 1 shows a cross section of a rail fastened to a tie means of two of the improved rail fasteners A. rail fasteners, as indicated in Fig. 2, are formed with hooks at the lower end, adapted to engage a pipe B, preferably of cast metal, which is fitted into a hole in The upper end of each fastener is provided the tie. with a threaded aperture, in which a bolt C is fitted. The bolt is adapted to be screwed down on the base flange of the rail. Fig. 3 shows a slightly modified form of the fastener. For street railways a different construction is required, as indicated in Fig. 4. Here the fasteners E are formed with threaded sleeves F. Screw plugs G are adapted to be screwed into the sleeves F, so as to bring their lower points into contact with the base flange of the rail. The rail and fasteners are imbedded in concrete, or the street paving material. with only the upper ends of the sleeves exposed. is merely necessary to tighten the screw plugs Θ once in a while by inserting a key wrench in the sockets H. The inventor of this rail fastener is Mr. George Dorffel.



SANITARY REFUSE RECEPTACLE.



RAIL FASTENER.

RECENTLY PATENTED INVENTIONS.

Of General Interest.

Of General Interest.

RWIVEL AND EXTENSION CONNECTION
FOR SUCTION-PIPES OR HYDRAULIC
DREDGES.—J. W. BACKETT, Jacksonville,
Fla. This connection is to take the place
of the ordinary suction hose and the ball and
socket joint now used, and arranged to permit the drag to readily accommodate itself
to irregularities in the bottom of the waterway to be dredged, and to change its relative
position with respect to the dredge as the
demands of the practical work require, and
without causing any undue stresses on the
suction pipe or the hull of the dredge.

HEAD-HEST.—E. C. LEAHY, Sydney, Nova

suction pipe or the hull of the dredge.

HEAD-REST.—E. C. LEAHY, Bydney, Nova Scotia, Canada. When used in connection with reclining chairs the invention consists of a head-block supported on a universal joint and having head-supports, with means for locking the joint and supports in adjustable positions; and as a pillow, the same general construction is employed, and is supported on the top of a casing vertically adjustable relatively to the casing body. It is for use by barbers, parlor-cars, dentists, etc., and as a pillow for campers, patients, etc.

HOLDER FOR ABSORBENT COTTON—W.

pillow for campers, patients, etc.

HOLDER FOR ABSORBENT COTTON.—W.

J. DUBANT, Spencer, Iowa. The invention relates to a holder adapted to receive a roll of cotton, and which is adapted to enable the cotton to be withdrawn as desired, while at the same time it is fully protected from dust and dirt. It is especially useful in the offices of surgeons and pharmacists, and in dispensaries and hospitals.

pensaries and hospitals.

NON-REFILLABLE BOTTLE.—J. BURNSTEIN, 8t. John's, Newfoundland. The object
here is to provide a bottle arranged to effectively close the bottle when not in use,
to allow convenient pouring of the contents of
the bottle into a glass or other receptacle,
and to prevent unauthorized persons from refilling the bottle with spurious goods.

PAVING-BLOCK.—D. ATHERTON, Philips-burg, Pa. The aim in this case is to provide a block, of which a series can be conveniently assembled to interlock with each other and to form transverse interlocking courses or rows, with a view to prevent transverse shift-ing of the blocks in the roadway even if the roadway is without curbs.

readway is without curbs.

Coloration Process.—B. D. Avis, Jn., Wallace, W. Va. in the present patent the invention has reference to coloration process, the inventor's more particular purpose being the provision of a simple and inexpensive method of producing iridescent tints and colorations upon glass or upon opaque surfaces requiring comparatively little preparation.

Hardware,

II. Inc. SHAVER.—A. M. PRESTON, Broxton, Ga. The invention consists of a body formed to receive the shaved ice, and carrying a shaving blade and a movable member constituting ild for the body and operable to force the shaved ice from the body, the latter having preferably a plurality of compartments which are simultaneously filled with the ice.

BHOE-POLISHER.—F. VAUGHN, San Fran-cisco, Cal. The invention relates particularly to that type of polishers adapted to hold and inclose the polishing fabric. An object is to provide a device which will hold the fabric tightly, and the stronger the pull on the fab-ric the tighter will the device grip it.

Heating and Lighting.

GAS-IGNITING DEVICE.—W. GRIX, Schöneberg, near Berlin, Germany. The device consists of an igniter proper, such as a platfoum pilule, an electric spark former or an incandescent wire, which is carried directly or through the agency of suitable parts by a compensation rod, so that, after the gas is ignited, the said rod is bent by the heat and moves the igniter out of the sone of hot gases.

Household Utilities,

REFRIGERATOR.—O. M. CAMPBELL. Van Buren, Ark. The purpose here is to provide details of construction of a refrigerator that will render it very convenient, insure proper efreulation of cold, dry air throughout the interior of the refrigerator, prevent sweaty deposits of moisture on the walls within the refrigerating chamber, and afford perfect drainage for water formed by melting of ice.

RENOVATOR.—J. H. BROWN, New York, N. Y. This invention has in view a manually-operated device for household use in which the dust and dirt are removed by suction. It consists of two upright wheel-supported frames-rigidly connected together at the bottom by a platform, and at suitable points thereabove; a receptacle seated on the platform; a nozale applied to the part to be cleaned; a rotary pump having its inlet connected with the nosale and discharging into the receptacle, and a driving mechanism for the pump, journaled on the frame.

en the frame.

EGG-TESTER.—EVELUM LEISS, Bronxville,
N. Y. The invention belongs to that class of
testers which consists of a box having openings in the top in which eggs are adapted to
be seated, in combination with a mirror in the
box under the openings, for reflecting such
light as passes through the eggs, the same
being observable through a sight-opening located at a point convenient above the mirror.

Machines and Mechanical Devices,

Machines and Mechanical Devices.
PULP-REFINING ENGINE.—F. W.
QUANTE, Vincennes, Ind. The main object of
the inventor is to provide a shell filling which
has the corrugated surface necessary for the
reduction of the pulp, but which obviates a
former objection, in that all of the pulp is
forced into repeated and intimate contact
with the revolving plug, thereby rendering the
product of uniform texture.

product of uniform texture.

A TTACHMENT FOR LINOTYPE-MA-CHINEM-A. F. Welling, New York, N. Y. More particularly the invention relates to devices for determining the number of quads to be allowed for a cut, so that the operator will be enabled to assemble the proper number of matrices having intelligible characters to fill the space at one side of the irregular outline of a picture or design and then insert the proper number of quads or blanks to fill the remainder of the line.

NURSERY-CHAIR.—P. S. CHANDLER,

the remainder of the line.

NURSERY-CHAIR.—P. S. CHANDLER,
Mountpleasant, Tenn. When the chair is
set up and the frame is piaced in position
encircling the chair, the rear ends of the
arms are depressed so that the pins engage
the enlarged portions of the slots, thus preventing disengagement of the tray from the
undercut notches, until the rear ends of the
arm are again lifted to disengage the pins.

arm are again lifted to disengage the pins. FRICTION-CLUTCH.—M. S. SLAGT and T. J. Kelley, Everett, Wash. One purpose here is to provide details for a clutch, which are simple and quick in operation, not liable to slip, and that will positively lock together two parts of a machine they are connected with, so that said parts will co-operate or release them instantly when this is essential for the proper operation of the parts connected by the clutch.

(ANG-PUGER — D. C. LEYMARD, Columbia.

of the children.—D. C. LEGNARD, Columbia, S. C. The main object of this improvement is to provide a machine which has movable members constituting part of the frame of the device, which can be swung up out of the way to permit easy access to the saws and thereby enable the operator to file them while they are on the arbor.

CALCULATING-MACHINE .- C. L. NELSON, CALCULATING-MACHINE.—C. I. NELSON, Seattle, Wash. This invention relates to improvements in machines of that type in which the keys are operated in accordance with the number to be listed, and more particularly to that type disclosed in a previous patent granted to Mr. Nelson, although various features of the present invention might be employed in other calculating machines than that shown in said patent. in said patent.

In said patent.

PAPER-CUTTING MACHINE.—G. M. FARN-HAM, South Brewer, Mc. This invention refers to certain improvements in machines for cutting paper into diagonal strips, and more particularly to that type of machine in which there is employed a cutter disposed at an angle to the roll of paper to be cut, and adjustable to vary the angle at will.

Note.—Copies of any of these patents will be furnished by Munn & Co. for ten cents each. Please state the name of the patentee, title of the invention, and date of this paper.

Legal Notices



INVENTORS are invited to communicate with Munn & Co., 361 Breadway, New York, or 625 F Street, Washington, D. C., in regard to securing valid patent protection for their inventions. Trade-Marks and Copyrights registered. Design Patents and Foreign

registered. Design Parents and Foreign Patents secured A Free Opinion as to the probable patentability of an invention will be readily given to any inventor furnishing as with a model or sketch and a brief description of the device in question. All communications are strictly confidential. Our Hand-Beek on Patents will be sent free on recenced.

equest.
Ours is the **Oldest** agency for secu:
t was established over sixty years ago.

MUNN & CO., 361 Broadway, New York Branch Office. 625 F St., Washington, D. C.

INDEX OF INVENTIONS

For which Letters Patent of the United States were Issued for the Week Ending September 14, 1909,

AND EACH BEARING THAT DATE

at end of list about copies of these

Adhesive fluids, device for supplying, Windle	
& Ollerenshaw Adjustable trap, J. H. Brady	933,938 934,038
Doan Air compressor governor, Kloer & Leavell Alarm or time check, R. Turck	934,323
Album, post card, H. P. Morris	
Amusement device, Liebling & Schmidt Amusement device, H. A. Shaules Armature, knockdown, E. W. Presbrey	933,786

American	
Armatures of dynamo electric machines,	Coop or Copper
Armatures of dynamo electric machines, winding for, B. G. Lamme. 933,765 Attaching device, D. Hoyt. 933,757 Auger, post hole, H. E. West. 934,029 Automobiles and other machinery, transmission gear for, L. T. Rhoades. 934,016 Automobiles, suspension spring system for, C. A. Lieb	reiss
Automobiles and other machinery, transmis- sion gear for, L. T. Rhoades 934,016	Hang
Automobiles, suspension spring system for, C. A. Lieb	Corsets.
Gorette 934,067 Axle coupling, reversible car, M. Markarian 934,033 Axle skeins for vehicles, construction, J. E.	Compling
Axle skeins for vehicles, construction, J. E. Wilcoxen 933,806	Cover re
Bait, artificial fish, N. W. Moran 934,087 Bait bolder, J. F. Beatty	Crate, J. Crate, C Crate, fe
Balt lecoxen by Wilcoxen 933,974 Balt lecoxen 18 N. W. Moran 933,974 Balt artificial 88 N. W. Moran 934,087 Balt lecoxen 18 Bentle 933,974 Barrel, J. W. Denmedt 934,051 Barrel, J. W. Denmedt 934,051 Barring for graph 11 M. Goheke 933,974 Bearing for graph 11 M. Goheke 933,974 Bearing for graph 12 M. Goheke 934,291	Crate, sh Cream ri Cross he
Rearing police I. I Aldelden 022 725	Cuff hol
Bozard 934,291 Bearing, roller, L. J. Aldridge 933,735 Bed, J. W. Fuller 933,971 Bed rail notching machine, A. McLean 934,090	Cultivato Cultivato Cultivato
For a second sec	Current A. C
Belt fastener, J. W. Kidwell	Cut off, Cycles a
Bilge water discharger, C. A. Curry. 933,891 Billiard cue, I. A. Gormon. 934,162 Billiard cue tip, I. A. Gormon. 934,163	Cylinder
Billiard cue tip. I. A. Gormon. 934,163 Block forming machine. C. R. Waiter. 934,120 Block machine. W. L. Keller. 934,320 Boat, F. M. Thompson. 934,373	Cylinder Decoy, O Delivery
Belt attachment, Dalmar & Wander. 934,290 Belt fastener, J. W. Kidwell. 934,321 Belt tightener, Wallace & Dow. 934,432 Belvele spring fork, H. C. Preston, Jr. 934,013 Bilge water discharger, C. A. Curry. 933,891 Billlard cue, I. A. Gormon. 934,162 Billlard cue tip, I. A. Gormon. 934,162 Block forming machine, C. B. Walter. 934,312 Block machine, W. L. Keller. 934,313 Boat, F. M. Thompson. 934,373 Boat and vessel, P. Igats. 933,905 Boiler cleaner and feed water heater, A. N. Jones Boller furnace, locomotive, F. F. Gaines. 934,137	Deposit Bryan Die stock
Boller cleaner and feed water heater, A. N. Jones	Dipping t
Boiler hanger, C. E. Lingenfelter 933,909 Rullers system of washing and filling loco-	Dispensin
	burg Display Door adia
Book, blank, scrap and similar, E. F. Hoberg 934,311 Book, loose leaf, T. C. Bruhn. 933,832 Book rest, D. Duff. 934,148 Boot or shoe, C. Pease 934,148 Bottle, S. Bofson-Schmidt. 934,358 Bottle cap, G. E. Stabl. 933,795	Door adju Door chec Door oper Door sto
Book Fest D. Duff S34, 158	Door sto Dough di Draw ba
	Drawer p
Bottle holder, J. F. Parker	like, Jr.
Bottles, jars, and the like receptacles, closure for, A. F. White	Drill stee
Bracket F J Moran 934 414	able Driving Dropper.
Brake. See Load brake. Brake system, fluid pressure, W. H. Sauvage 934,019	Dye, azo, Dye, brow Dye, oliv
Bride From or attreup or joint hangers, machine for shaping, W. Jamesh. 934,168 Brooker, A. Noble Brooker, G. A. & 934,058	Dye, oliv Eaves tro ener
Brooder, A. Noble	Electric spacia Electric f
Bucket for concrete building material, N. C. Newerf	Electric l
C. Newert 2008 line, A. F. Carlson 933,745 Burglar alarm, electric, M. Trautmann 934,108 Bust reducing attachment, J. M. Bodensiek 933,739 Calcium allield, producing, Wilson & Haff, 934,379	Well Electric I
Calcium silied, producing, Wilson & Haff, 934,379 Calculating machines, setting device for, J.	Electric n Electric n
Graber	Electrical spaces Electrical
Graber 9344-901 Glak, removable, G. S. Meyer 9344-901 Calks on horseshoes, machine for forming and sharpening, Shover & Palmer. 933,995 Camera mechanism, photographic, W. Verbeck, 933,801	ment
	Lacki Electrical
	Elevator, Engines, a bustio
Can nearing machine, ampie, accurate to	Engines, a Engraving
Candle sythesine implement C Il Man-	Excavator Explosive.
Beck 934,196 934,196 933,87 934,98 9	Eyeglasses Eyeglasses
Car body, J. M. Hopkins	Eyeleting Fabrics.
Car coupling, W. L. Wright	O. Ve Fastener,
Car, drop bottom dump. H. C. Brunker 934,279 Car, dumping. A. Becker 934,267, 934,268 Car fender, E. Barrett 933,950	J. Jer Faucet, J.
Car fender, E. Barrett. 303,303 Car fender, C. Gardiner. 933,973 Car, passenger, Curwen & Smith. 934,142 Car, passenger, C. K. Pickles. 934,350	Food wat
Car coupling, H. B. Chaimers. S53, 939 Car, drop bottom dump. H. C. Brunker. 934, 277 Car, dumping. A. Becker. 934, 237, 934, 238 Car fender, E. Barrett. 933, 950 Car fender, E. Gardiner. 933, 950 Car passenger. Curwer. & Smith. 934, 250 Car seat. H. White Car underframe. A. Becker. 934, 382, 934, 281 Cars. drop door fastening for, Furgeson & Wheland Cars. drop door fastening for, Furgeson & Wheland Cars. drop door operating mechanism for hopper bottom. A. Becker. 934, 280 Carbureter, M. Steel, Jr. 934, 367 Carda. electrical pattern for the manufac- ture of jacquard, P. Welsenborn. 933, 805 Carper sweeper. G. B. Deacon. 933, 805 Carper sweeper. G. B. Deacon. 933, 939, 939, 934, 905 Caster stacking bearing box. V. C. Lap- caster stacking bearing box. V. C. Lap- grapher. 234, 905 Caster stacking bearing box. V. C. Lap- 333, 939, 934, 905 Caster stacking bearing box. V. C. Lap- 243, 906 Caster stacking bearing box. V. C. Lap- 334, 905 Caster stacking bearing box. V. C. Lap- 334, 905 Caster stacking bearing box. V. C. Lap- 344, 905 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 906 Caster stacking bearing box. V. C. Lap- 345, 9	Feeding l Wrigh Ferrule, Fertilizer
Car underframe. A. Becker 934,382, 934,383 Cars, drop door fastening for, Furgeson & Wheland 934,299	Filing cal
tars, drop door operating mechanism for hopper bottom, A. Becker 934,269	Filter cell Fire and C. St Fire bar, Firearm, Firearm s
Carbureter, M. Steel, Jr	Firearm, Firearm s
Carpet aweeper, G. B. Deacon	Fishing de Flexible 1 L. Ct
pert 933,999 Caster, furniture, G. E. Nevberth 934,094	Flue-cutter
Caster, leg mount, G. E. Neuberth. 334,005 Casting rolls, J. L. Lewis. 333,906 Casting rolls, mold for, J. L. Lewis. 334,410 Cement block, W. L. Keller. 324,319	Flying m F. De Fodder-cut
Cement block, W. L. Keller	Folder, se Folding b
making, C. Ellis	
Carlet aweeler, v. B. Fracton, v. C. Lap 933,999 Caster, furniture, G. E. Neuberth 934,004 Caster, leg mount, G. E. Neuberth 934,006 Casting rolls, J. L. Lewis 933,996 Casting rolls, mold for, J. L. Lewis 934,410 Cement block, W. L. Keller 934,410 Cement blocks, waterproof, J. A. Fincke 944,061 Cement clinker, process and apparatus for making, C. Ellis 94,061 Cement clinker, process and apparatus for making, C. Ellis 150,000 Cement clinker, process and apparatus for 154,061 Chlorin, See Nursery chair. 934,154 Chair, W. M. Clark. 934,154 Chair, W. M. Clark. 934,285 Cheese cutter, O. O. Ozias 93,864 Chlorin, separating and concentrating, 604 Schilld & Spitzer. 943,993 Chlorin, separating and concentrating, 604 Schilld & Spitzer. 943,993	Furnace.
Chair. See Nursery chair. Chair. W. M. Clark. 934,285 Check bit. T. Tippit. 933,864	Brand
Cheese cutter, O. O. Ozins	Game app
and other ware of, W. Stubbs	Game dev
Chorin, Seintrating and Concentrating, 634,400 schmidt & Spitzer. 834,400 Chuck, W. G. Sanborn. 953,923 Chuck drill, J. Bradley. 953,471 Charn, J. T. Armstrong. 953,948 Churas, lever construction for, R. M. Rowe. 834,217	Game app Game app Game dev Garment Gas and ovens, Gas appar Gas, appar natura
Churn, J. T. Armstrong	Gas, appar
Chute package, Perpignan & Riebelman. 934,347 Cigar lighter, F. J. Wildemann. 934,119 Clasp, G. N. Hall. 933,752 Cleuning apparatus, F. J. Seeley. 933,926	Gas burner Gas, comp
and other ware of, W. Stubbs. 934,231 Chlorin, separating and concentrating, Gold- Chuck, W. G. Sanborn. 933,923 Chuck (F. G. Sanborn. 933,923 Chuck drill, J. Bradier. 933,948 Churn, J. T. Armstrong. 933,948 Churns, lever construction for, R. M. Rowe. 934,217 Chute package. Perpignan & Riebelman. 934,214 Clasp G. N. Hall. 935,732 Clexining apparatus, F. J. Seeley. 933,923 Clexining apparatus, F. J. Seeley. 933,926 Clock, electrically operated, H. Gillette. 933,293 Clover buller, J. C. Klatter. 934,406 Clutch driving mechanism, controlling means for electrical. A. P. Steckel. 934,104 Clutch mechanism for automobiles and for other applications, friction, A. Balloca 934,264 Coal washer, F. R. Wilson, Jr. 1853,898 Coat, G. W. Davis. 933,899 Coat, G. W. Davis. 933,899	Gas, comp ing by Gas cut o M. F.
Clutch driving mechanism, controlling means for electrical, A. P. Steckel 934,104	Gas produ Gas scrubi
Clutch mechanism for automobiles and for other applications, friction, A. Balloca 934.264	M. F. Gas gener Gas produ Gas scrubi Gas washi Gate, T. Gate, W. Gearing, G Gearing, G
Coat, G. W. Davis	Gearing, Gearing, G
Cocks, locking air, J. S. Sheafe	Bradle
Coffee roaster, L. Breyer	Glassware
other applications, friction, A. Balloca 084,264 Coal washer, F. R. Wilson, Jr. 1853,808 Coat, G. W. Davis. 185,808 Cock, quick acting bib. L. J. Sommer, Jr. 935,859 Cocks, locking air, J. S. Sheafe, 934,699 Cocks, locking air, J. S. Sheafe, 934,699 Coffee percolator bag, I. Norwood. 935,917 Coffee roaster, L. Breyer. 934,137 Coll winding machine, F. Mueller. 935,778 Coll winding machine, F. Mueller. 935,778 Coke drawing apparatus, E. D. Batliff. 934,215 Collander, M. A. Balliff. 935,949 Column, wooden, C. A. Nickerson. 935,945 Comb, E. Jennison. 935,945 Compositing machines, means for justifying tabular matter in typographical. Hol- compositing machines, means for justifying tabular matter in typographical. Hol- Compositing machines, means for justifying tabular matter for the prographical of matter, G. W. Boggs. 934,403 Composition of matter, G. W. Boggs. 938,935 Composition of matter, G. W. Boggs. 934,938 Composition of matter, G. W. Boggs. 934,93 Composition by the composition of matter, G. J. & F. G. 934,412 Composite belder, D. R. Lutter. 922,773	Gold separ Grain chui B. M. Grain cond
Column, wooden, C. A. Nickerson 933,915 Comb. E. Jennison	Acheeo
tabular matter in typographical. Hol- bourns & Longhurst 933,835, 934.403	Grinder, s Gun, self
Composition of matter, G. W. Boggs 933,875 Composition of matter, C. J. & F. G.	Grinder, s Gun, self Gun, wate Guns from
Concrete bridge, D. B. Luten	Hammer, Hammock
Concrete chimney construction, G. Mas-	Harness, 1
Concrete-mixers, power charging device for, E. B. Symons	Harrow at
composition of matter, U. 3, & F. G. Marius 934,412 Concrete bridge, D. B. Luten. 933,771 Concrete bridge and holding mechanism, 934,294 A. N. Doud 934,294 Concrete chimney construction, G. Maschino Concrete-mixers, power charging device for, B. Symons. 934,234 Concrete reinforce, H. E. White. 934,378 Concrete structure, reinforced, E. McCullongh	Sacket Hat pin #

B. Petsche...
tallurgical. W. M. Johnson...
n. C. M. Symonds...
n. W. Stull... 934,232,

machines.	022 765	Coop or crate, folding, J. P. Carnefix Copper refining apparatus, F. L. Antisell	934,282
	933,757 934,029	ressue	13,020
, transmis-	034,016	Hanger	933,753 934,044
oystem for, ront, A. J.	933,997	Hanger Corset, G. H. Cooley Corset, hip reducing attachment for, J. M. Bodensiek Counter skiving machine, M. Canty	934,272
Markarian	934,067		934,039
	933,806	Cover retainer, J. E. Brown	934,028 934,277 933,876 933,911 .934,280
n §	934,087 933,818 934,051	Crate, J. E. Mahoney Crate, C. B. Burwell	933,911
. Meldau 1	934.330	Crate, folding, B. H. Goddard	934,156 934,337
Davis &	933,974	Cream ripener, T. L. Valerius	933,934
	934,291 933,735 933,971	Cultivator, N. Tripp Cultivator, Cultivator, Cultivato	934,091 934,238 933,977
McLean 9	034,090 $033,810$	Cultivator, gravity hand, J. E. Hosmer Current transformer regulator, alternating,	933,986
apparatus,	934,377 934,396	A. C. Lasher	933,767
ander 9	34,290	phase, J. M. S. Fontecha	934,063 934,364 933,880
ов, Jr 9	34,290 34,321 34,248 34,013	Cycles and like vehicles, toe clip for the	934,064
Ourry 9	33,891 34,162	Cylinder head, F. L. Sessions,	934,064 933,789 934,335
alter 9	34,163 34,112 34,320	Decoy, Oliver & Westcott	934,342 934,202
	34,320 34,373 33,905	Deposit and collection receptacle, C. F. Bryant	933,883
heater, A. 9	34.314	Bryant Die stock, R. H. Burke Dipping tank, Viktor & John Diph washing machine, A. L. Pearce Dispensing receptacle, K. C. Jophing Display case and valise, combined, C. Bill- burg	933,935
Gaines 9	34,157 33,909	Dispensing receptacle, K. C. Jopling Display case and valise, combined, C. Bill-	934,346 934,182
	33,937	burg Display rack. J. Romshe	933,874 933,851,
9	34,311 33,882	Door adjusting device, A. Hollmann Door check and closer, O. Anschutz	933,985 934,261
	34,148 33,848 34,359	Door stop, S. P. Crowell	934,153 934,392
934,358, 9 ter, E. C.	34,359 33,795	Draw bar carrier, C. H. Tomlison	934,183 934,375 934,258
9.	33,988	Dress suit cases, traveling bags, and the like, bandle cap for, F. Waldschmitt,	001,200
nn 90	34,230	burg Display rack, J. Romshe. Door adjusting device, A. Hollmann. Door check and closer, O. Anschutz. Door opening device, A. 8. Flowers. Door stop, 8. P. Croswell. Dough dividing machine, T. W. Kaiser. Draw bar carrier, C. H. Tomilison. Drawer pull, C. B. Adams. Dress sult cases, traveling bags, and the like, handle cap for, F. Waldschmitt, Drill steel coupling, C. C. Hanses	933,936 934,069
9	34,252 33,933	Drills or other apparatus, carriage for portable pneumatic, R. H. Robinson	934,418
W. H.	34,414	Driving mechanism, N. Smelansky Dropper. See Trellis wire dropper. Dve. ago. Jansen & Neelmeler933.841.	933.842
hangers.	34,019	Driving mechanism, N. Smeinnsky. Dropper, See Trellin wire dropper, Dye, ano, Jansen & Neelmeler, 933,841. Dye, brown sulfur, Gley & Dieterie Dye, olive sulfur, Gley & Dieterie Earee per for W. Excher or protectors, fast-	933,842 934,302 934,303
	34,168 34,206	Eaves trough strainers or protectors, fast- ener for, W. Feyler	933,969
G. A. &		spacing block for J. A. Baird	933,737 933,815
terial, N.	34 092	Eares trough strainers or protectors, fast- ener for, W. Feyler. Electric apparatus, ventilating plate and spacing block for, J. A. Baird. Electric furnace, T. F. Baily Electric heater, C. E. Johnson Electric furnace, T. A. Baird. Electric heater, C. E. Johnson Electric learner, C. E. Johnson	933,815 933,989
tmann 95	33,745 34,108 33,739 34,379	Electric light cluster fixture, J. H. Caldwell Electric machine, dynamo, W. D. Pomeroy Electric machine, dynamo, A. H. Wouters. Electric signal, W. K. Howe. Electrical apparatus, ventilating plate and spacer for, H. D. Summers. Electrical energy on any circuit, arrange- ment for indicating and recording per- manently the maximum demand for. Lackie & Steele. Electrical switch, F. H. Buffehr. Elevator, D. Corcoran. Engines, adjustable crank for internal com- bustion, C. J. Gotti. Engines, gearing for traction, A. W. Altken Engraving machine, A. Rostad.	933,887 934,210 934,256
Bodensiek 93 & Haff. 93 lce for, J.	13,739 34,379	Electric machine, dynamo, A. H. Wouters Electric machine, dynamo, L. J. Hunt	934,256 934,405 933,756
ice for, J.	34:401	Electric signal, W. K. Howe. Electrical apparatus, ventilating plate and	933,756 934,369
r forming	34,197	Electrical energy on any circuit, arrange- ment for indicating and recording per-	202,000
	33,801	manently the maximum demand for, Lackie & Steele	933,845 933,956
ds	34,371	Electrical switch, F. H. Buffehr Elevator, D. Corcoran	933,956 934,141
ie. M. D.	54,404	Engines, adjustable crank for internal com- bustion, C. J. Gotti	934,164
driance &	34,134	bustion, C. J. Gotti. Englines, gearing for traction, A. W. Altken Engraving machine, A. Bostad. Enveloy opener, W. L. Barber. Excavator, hydraulic, C. B. Askew. Excavator, hydraulic, C. B. Askew. Explosive, O. F. von Schrootter. Eyeglasses, W. H. Weaser Eyeglasses, connecting guard for, M. B.	933.945 934,216 934,032
B. Man- 93	4.196	Excavator, hydraulic, C. B. Askew Explosive, O. F. von Schroetter	934.031
& Camp., 93	33,987	Eyeglasses, W. H. Weaser	934,020 934,113
93	34,398	Eyeglasses. connecting guard for, M. B. Korman Eyeleting machine, G. Goddu. Fabrics, apparatus for removing lye from, O. Venter Fastener, K. Green. Fastener, K. Green. Fastener for hinged closures, adjustable, J. Jonks Faucet, J. J. Smith, et al. Feed water beater, J. W. Currie. Feed water beater, J. W. Currie. Feeding live stock, apparatus for, D. W. Wright. Ferrale, H. S. Gladding. Ferrilizer distributer, S. E. Jones. Filling cabinet, E. C. Holland. Filter cell, G. M. Kneuper. Fire and temperature alarm or indicator, C. Smith	933,763 934,066
	33,760 33,941 33,959	Fabrics, apparatus for removing lye from, O. Venter	934,110 934,165
runker 93	4,279 14,268	Fastener for hinged closures, adjustable,	934,180
93 934,267, 93 93 93 94 93 95 95 95 95 95 95 95 95 95 95 95 95 95	3.950 3.973	Faucet, J. J. Smith, et al	934,101 934,393
th 93	14,142 14,350 14,166	Feeding live stock, apparatus for, D. W. Wright	933,940
934,382, 93 1 934,382, 93 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	4,121 4,383	Fertilizer distributer, S. E. Jones	933,750 934,317 933,755
urgeson &	4,299	Filter cell, G. M. Kneuper	934,076
nism for	4,269	C. Smith Fire bar, A. Esplen	
manufac-	3.805	Firearm, repeating, W. H. Gates Firearm safety mechanism, W. H. Gates	934,158 934,065 934,150
C. Lup-	3,893	Flexible material, device for feeding, F.	933,890
93	3,999 4,004	Flue-cutter, Pope & Hanten	934,351 934,001
h 93	4,005 3,996 4,410	Flying machines, acrew propeller for, P. F. Degn	934.394
	4,410 4,319 4,061	Folder, sectional, S. B. Hutchinson	933.901
ratus for	4.056	Forging machine, G. Peiseler.	934,073 934,273 933,783 934,002
93	4.056 4.221 4.348	Fuel, domestic or steam-producing, G. Grif- fiths	934,307
FOX 93	4,154	Sths Furnace, B. Bouse, Jr. Furnaces, device for feeding air to, A. W. Brand	934,018
93	3,864 4,208	Fuse receptacle, Rowe & Kintner	934,275 933,787 934,055
ng hollow	4,231	Game apparatus, D. A. Jackson	934.179
ing, Gold-	4,400	Garment facing strip, J. I. McDonaid Gas and air supply to large chambered	934,175 934,204
	3,923 3,471 3,948	ovens, H. Koppers	933,933 933,793
M Borres 02.	4.217	ons, apparatus for recovering light oils from natural, J. L. Gray	933,976
93	4,347 4,119 3,752 3,926	Gas, composition of matter for manufactur- ing hydrogen. Brindley & Bennie.	934,120 934,036
Hette wo	3.926	Gas cut off and safety device, automatic, M. F. Nichols	934,339
ng means	4,406	Gas producer, F. Weideneder	933,828 933,804
and for	4.264	Gas washing apparatus, J. J. Nix	933,206 933,966
900	4.264 3.808 4.049	Gate, W. Crosser Gearing, G. A. Steinle	934,070 934,288 934,105
ner, Jr 93	3,859 4,099	Gearing, change speed, A. M. Wolf	933,970
93	3.917 4.137 3.792 3.778	Bradley Glass, decorating, W. J. Peterson	984,136 934,0 94 933,939
th 93 er 93 iliff 93	3,778		933,939 933,772
93:	4 215 3,949 3,915	B. M. Sypher	933.930 934,026
instifying	4,181	Graphite, making pure unctuous, E. G. Acheson	933,944
cal. Hot- . 933,835, 934	4.403	Grinder, screening, E. & E. O'Brien, Jr., Gun, self loading recoil, H. Lehmann	933,780 934,325 933,961
k F. G.	3,875	Guns from behind cover on targets, ap-	
933	4,412 3,771	Hammer, power, F. Raymond	934.223 934,355
echanism. G. Mas-	4,294	Graphite, making pure unctuous, E. G. Acheson Grinder, acreening, E. & E. O'Brien, Jr., i Gun, self loading recoil, H. Lehmann	933,921 934,304
wine for	3,774	Harness hanger, W. I. Taylor	933,931 934,313
93	1.234 I 1.378 I	Hat brim press to form welt edges, C. E.	934,008
93- 93- MeCul- 93- 98- 98- 98-	4,089	Hat pin guard, F. B. Greenwald	934,219 934,306
ohnson 983	3.849 3.843 4.370	Heater, Bromley & Marshall	983,811 983,879
. 934,232, 93	1.233	Hook and eye, C. S. Lichtenstein	34,149 34,195
		*	



Star" Foot and Power Series Chothag Cross Lathes Send for Catalogue B.
SENECA FALLS MFG. CO.
695 Water Street,
Seneca Falls, N. Y., U. S. A.

Engine and Foot Lathes

MACHINE SHOP OUTFITS, TOOLS AND SUPPLIES. BEST MATERIALS. BEST WORKMANSHIP, CATALOGUE FREE SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati, O.

STODDARD INCORPORATING COMPANY, Box 8000
PHOENIX, ARIZONA

Foot and Power and Turret Lathes, Plan-SHEPARD LATHE CO., 138 W. 24 St. Cincinnati, O.

WORK SHOPS BARNES' FOOT POWER

MACHINERY
allow lower bids on jobs, and give
greater profit on the work. Machines
sent on trial if desired. Catalog Free.
W. F. & JOHN BARNES CO.
Established 1881.

1999 Rusy ST. ROCKFORD, ILL.



MARSTON'S

Patent Hand Foot & Power Circular & Band Saws

J. M. MARSTON & CO. 247 Ruggles St., Boston, Mass.

WE WILL MAKE and give you estimates on manufacture of any metal novelty. Automatic manufacture manufacture of any metal novelty. Automatic ma-chinery, tools, dies and expert work our specialty AUTOMATIC HOOK & EYE CO., Hoboken, N. J.

Pipe Cutting and Threading Machine
For Either Hand or Power
This machine is the reputar hand machine supplied
with a power base, pinkne, constembnis, etc., and
can be worked as an ordinary power
machine or takes from its base for
use as a hand machine. Pipe is in.
to 15 in. dismoster handled seally in
amall room. Historiand catalogue—
price list rice on application. THE CURTIS & CURTIS CO.



GARTER

PIONEER SUSPENDER CO. 718 Market St., Philadelphia

CHIEF DRAFTSMAN

Practical Drafting, Detailing, Designing

SENSITIVE LABORATORY BALANCE By N. Monroe Hopkins, This "built-up" laboratory balance will weigh up to one pound any "laboratory balance will weigh up to one pound any the laboratory balance will be up to the laboratory and the laboratory and la

\$15 to \$35 a Day

This is what you can make by operating our 1909 Model Wonderful Ferrotype Machine Tales pictures 13/8 × 25/8. Can also be revenible to take groups and buttons. Best money-maker at Street Fairs, Carnivals, etc.

Our New Tele-Camera-Scope: the latest Button Machine in the market, \$15.
Plates to fit any Bütton Machine in the market 80c, per hundred. Button Frames 75c. to \$1,50 per group. Plates 15/1×22/8° best in the market, \$1 per hundred, Mounts 20c. to \$30c. per hundred. Write today for free Catalogue.

NEW YORK FERROTYPE CO. 142-144 Delancey St., New York



Horse detaching device, N. M. Hollendeck, 934,171 Horsesboe calk, G. S. Meyer, 934,190 Horsesboe calk, removable, G. S. Meyer, 934,196, 94,196, 94,196, 933,947 Horseshoe calk, removable, G. S. Meyer, 3934,198, 934,200
Hose rack, inclosed, W. D. Allen. 933,494
Hulier. See Clover huller. 933,947
Hydraulic motor, Anderson & Ruddock. 934,128
Hydraulic motor, Anderson & Ruddock. 934,128
Hydrocarbon burner, G. A. Schoche. 935,851
Lee shaping machine. 1. Boyd. 935,851
Lee shaping machine. 1. Boyd. 935,851
Lee shaping machine and 934,038
Lee shaping machine. 1. Boyd. 934,038
Lee shaping machine and 934,039
Littation step. E. L. Woodman. 934,122
Linseam tri-ming machine. W. B. Keighley 334,138
Linsulator, section break. T. Varney. 933,800
Litermittent line switch, E. R. F. Creighton. 933,801
Lee State Stat SUPPLIES BEST MATERIALS. BEST WORKMANSHIP. CATALOGUE FREE SEBASTIAN LATHE CO., 120 Culvert St., Cincinnati. o., Intermit combustion engine, D. H. Coles. 933,926 Incompared and BUSINESS McComb Journal box, W. M. Duncan.

Julice extraction by diffusion, continuous, K. Phillipp

Kinematograph feed mechanism, C. Urban.

934,022

Knitting machine, cam cylinder, F. Al.

33,814

Knockdown case, G. M. Blaiser.

934,242

Knotter, B. E. Byrd.

934,388, 934,389, 934,389, 834,389, 334,389, 334,389, 334,389, 334,389, 334,389, 334,389, 334,389, Money Dox, J. Nutry
Motor: See Hydraulic motor.
Motor controlling device, electric, E. H.
Gelst

The ONOTO FOUNTAIN PEN COSTS YOU NOTHING-

This is what we claim:-

unless you find it is and

does all we claim!

- 1. Fills and cleans itself in 5 seconds.
- 2. Cannot leak, even when carried point downward.
- 3. SELF-REGULATING ink flow. Writes just as fast or slow as you wish.
- 4. INSTANTANEOUS ink flow. Writes at the FIRST
- 5. CONTINUOUS ink flow. Never MISSES a stroke.
- 6. EXACTLY-EVEN ink flow. Never blots, splatters
- 14 K Gold Iridium-tipped points. Never catch nor scratch and last for years.
- 8. Double ink feed—one above and one below the nib.
 (The secret of Features 3, 4 and 5.)
- 9. Barrel and cap made of finest quality polished black Vulcanite.
- 10. No dropper, clip or special ink necessary.
- A point, a size and a price for every Hand, every Purpose and every Pocketbook.
- 12. Sold on an UNCONDITIONAL Guarantee of absolute Satisfaction—OR MONEY BACK!

No other Fountain Pen, at ANY price, has ALL these 12 features. Few have even one of them.

Yet the Onoto COSTS YOU NO MORE than the old-fashioned finger-besmearing leaky Dropper-Fillers or the new-fangled impractical Rubber Sack and Pumpfilling kinds!

Simply see and try the Onoto. This is all we ask. And it's lell we need to ask. Because Seeing means Trying, Trying means Buying, and Buying and Buying means guaranteed Satisfaction.

Four Sizes—\$2.50, \$3, \$4 and \$5. 15 different style points in each size.

Look for the word ONOTO before you buy. It appears on the barrel of every genuine

ONOTO-your Guide and our

Sold, everywhere, by the leading Stationery, Department and Drug stores. If no local dealer is willing to supply you, write to us for Onoto Catalog 8, names of the nearest Onoto dealers and FREE Onoto Score Pada for "Bridge" or "Five Hundred." Please name your favorite local dealer.

ONOTO PEN CO., 261 Broadway, New York



Classified Advertisements

MUNN & CO., Inc.

NEW ENGLISH PATENTS ACT.—Manufacture in Rogland of patented articles. English firm with up-to-date workshop and most modern mechinery will underske by arrangement the manufacture of patented articles for American firm not wishing to open own factory in Rogland. Halchin, Schulz & Co., Lid., Lennox Home, Norfolk Street, Strand, London.

Ingairy Ne., 8868s.—Wanted to buy nickelold for buttons.

battons.

AGEN'S WANTED.—92 is sample outfit free. 50 per cent. profit. Credit given. Premiums. Freight said. Chance to win 526 in gold extra Let the largest whole-sale agency house in the United States start you in a profitable besiness without one cent of capital. Experience annecessary. Write for free outfit at once. McLean Black & Co., Inc., 60 Severy Sk., Botton, Mass.

Inquiry No. 8918, For manufacturers of "Wydt's Electro-Catalytic Sparking Plug."

MANUFACTURERS, CAPITALISTS - I will sell outright or manufacture on royalty a most valuable invention. For full particulars, address M. R. Schultz, Southampton, S. V.

Inquiry No. 8921. For the manufacturers of gilt

PATENTS FOR SALE.

FOR SALE-Patent No. 202.885. Speed gage for automobiles. So constructed that all vibration of the tudestor is obviated. For further information write to J. K. B., Box 735, New York.

Inquiry No. 8922. - Wanted the address of Worthington Boller Co.

FOR SALE ON ROYALTY.—A new and improved rotary engine, operated by compressed air and steam Sure seller when merits are known. Canadian patent also for sale. Thos. Jorgenson, Martines, California.

Inquiry No. 8931. For parties who manufacture the Western Stump sorer for boring stumps.

FOR SALE. Fountain Pen. Writes red and black Parented June 2, 198 Most valuable for business men-clerks, cashiers, quditors, newspaper men, etc. No brokers. Write Duples, 80 W. 40h St., New York City. Inquiry No. >941.-For manufacturers of ma-

FOR SALE.—Patent No. 99,174. Improved combina-tion lock for doors. One of the best articles for the market. Chesp to manufacture. Large profit. Apply to leventor. C. H. Cohn, 185 E. Halt Sc., Now York.

Inquiry No. N960. -For the autrees of the Windsor Mfg. Co., manufacturers of waterproof collars and

Inquiry No. 8966, -Wanted the address of the Cohendet Motor Co.

EDUCATIONAL.

CIVIL SERVICE EMFLOYERS are paid well for easy seminations of all kinds soon; expert advices sample questions and slowlet of describing post, one and is ling easiest and quickest way to secure them free Washington, ib. C.
I-quality Ne. \$977.—For manufacturers of machinery for manufacturers of machinery for manufacturer dendators.

HELP WANTED.

Inquiry No. S980. For the address of manufacturers of mortars and pesties that are used by druggists.

MISCELLANEOUS.

IF YOU WISH TO BUY OR SELL COINS and stamp and ask Mr. Alexander for information and a free copy of valuable ithus rated pamphlet. Alexander & Co., 33 Devember St., Boston, Mass. (Retablished 1872.)

Inquiry No. 8987. - Wanted, the manufacturers of the Van Winkle, Woods & Sons, and the Weber power

LISTS OF MANUFACTURERS.

COMPLETE LISTS of manufacturers in all lines sup-fled at short notice at moderate rates. Small and pecial lists compiled to order at various prices. Es-imates should be obtained in advance. Address tuns & Co., Ruc, List Department, Box 778, New York.

Inquiry No. 8980. For information regarding

Inquiry No. 8896. Wanted addresses of manufacturers of machinery for working crange wood mani

Inquiry No. >997. Wanted the address of the

Inquiry No. 9001. -For the address of progressive

Inquiry No. 9010, -Wanted to buy a "Rector

tseniry No. 9912.—Wanted to buy papier mache bexes in the shape of water melons, colored to res. m-

Inquiry No. 9614.—For manufacturers of ma-chinery, supplies, etc., to equip a small plant for the

Inquiry No. 9016. Wanted, machinery necessary for an installation of a plant for refluing sait by a modification of the Bessemer process.

Inquiry No. 9017.—Wanted, the address of m facturers or dealers in card board plaster or wood for plaster or wood

Inquiry No. 9020. Wanted the addre Inquiry No. 9621. -For manufacturers of machin-

Inquiry No. 9622. Wanted to buy a light, small

Inquiry No. 9023.—Wanted, to buy silk mach roun re-reeling, twisting, doubling, to the final profunctions is into clother.

Inquiry No. 9024. Wanted, the address of pa-who can manufacture fire extinguishers of metal.

Inquiry No. 9025.-Wanted, address of rubber

Inquiry No. 9026, Wanted, address of parties

Inquiry No. 9027 .- Wanted, the address of a Inquiry No. 9028. - Wanted, to buy a washing nachine that is run by a coil spring motor.

Inquiry No. 9029. - Wanted, catalogues and all aformation on machinery for braiding straw in manuscring straw hats.

		_
Plow, gang, C. Smart	933.8	58
Plow steering mechanism, motor, C. F.	HIII. 933.9	84
Plunger, H. E. Karnes	934.1	84
Pocket book or bill holder, W. H. S. Fe	rankd 934.0	60
Pole, sectional, O. O. M. Sciple	1955.8	
Pool table, R. Bailey	3054.3	80
Post card rack, Kaiser & Klein	934,3	18
Potato digger, D. Y. & D. E. Hallock.	Will. 18	80
Poultry securing device, J. F. Beatty	933.8	17
Powder receptacle, J. T. Stapleton.	933.7	96
Press and vulcanizer, combined, J. K.	WIII-	
Infin	933.8	68
Pressure generator, mixer, and engine,	com-	
binstion J. Illy	933,9	
Propeller, serew, D. F. Lawrence	933.7	
Pull socket, G. R. Thomas	934,2	36
Pumping engine, direct acting, J. 11	utch-	
ings	934,3	12
Pumps, shaft mounting for rotary, M	. A.	
Mills	934,0	
Punch, S. A. Lesan	934,1	
Push cart. J. Z. Benedict	934,1	
Push cart, Il. A. Veling	934,2	
Puzzle J. M. McCauley	934.2	
Radiator fitting, steam, J. J. Wilson	933,8	
Rail clamp, R. N. Walton,	1969-6	
Rail fastening, M. Eisig	934,0	54
Rall joint, M. E. Bethurum	934,2	71
Rail point, emergency, M. Holland	933,9	
Rail joint, splice bar, N. Benjamin	934.2	
Railway, automobile scenic, A. G. Nevi	lle 933,9	
Railway despatch catcher, A. Beamer.	934.13	

933,809 tle, C. R. Holden.... tle, G. S. Thompson. tle, Carpenter & Humph track, W. E. Sizemore. track, E. A. Barber.

933,747 933,785

933.855



One KOH-I-NOOR Pencil at 10c lasts longer than any 6 others at ANY price

17 different grades of hardness stationer will not supply you and softness 6B to 9H. If your write to us.

L. & C. HARDTMUTH, Est. 1790, 34 E. 23d St., New York

To be published about October 20th

Three New Interesting Books

The Scientific American Boy at School

By A. RUSSELL BOND

12mo. 320 Pages. 300 Illustrations. Price \$2.00 postpaid.

H18 book is a sequel to "The Scientific American Boy," many thousand copies of which have been sold, and has proven very popular with the boys. The main object of the book is to instruct how to build various devices and apparatus, particularly for outdoor use. The construction of the apparatus is a described and the instructions are interwoven in a story, a feature which has sisted in making the "Scientific American Boy" so popular and interesting to the

sisted in making the "Scientific American Boy" so popular and interesting to the street of "Scientific American Boy" so popular and interesting to the system of "Bill" and several of his companions at boarding school, sey form a mysterious Egyptian society, whose object is to emulate the resourcements of the ancients. Their Chief Astrologer and Friest of the Sacred Scarabeus gifted with unusual powers, but his magic is explained so that others can copy Under the directions of the Chief Engineer, dams, bridges and canal-locks are stated with the control of the Chief Admiral and Naval Constructor builds many types of boats, as of which are entirely new. The Chief Carisman and the Chief Artist also have leeparts in the work done by the Society, over which Fharion and his Grand Visien et al., and the Chief Artist also have leeparts in the Work done by the Society, over which Fharion and his Grand Visien et al., and the Chief Artist also have leeparts in the Work done by the Society, over which Fharion and his Grand Visien and the Chief Artist also have leeparts in the work done by the Society, over which Fharion and his Grand Visien appear of the Chapter II. Building a Dam: Chapter III. The Skiff; appear III. The Skiff; appear III. The Lake House; Chapter V. A Midnight Surprise; Chapter VI, Capter III. Surprise; Chapter VI, The Seismograph, The Chapter III. Surprise Chapter VI, Campting Hunting with a Compact Mount of the Chapter VIII. Surprise III. Surprise and Chapter XXII. The Bievele Sleigh; Chapter XXII. Apper Dotography; Chapter XXIII. The Blevele Sleigh; Chapter XXII. Apper SXVII. Apper XXII. Apper XXII. The Bievele Sleigh; Chapter XXIII. Apper Surprise Surprise Fountain.

Handy Man's Workshop and Laboratory

Compiled and Edited by A. RUSSELL BOND

12mo. 400 Pages. 350 Illustrations. Price \$1.50 postpaid.

VERY practical mechanic, whether amateur or professional, has been confronted many times with unexpected situations calling for the exercise of considerable ingenuity. The resourceful man who has met an issue of this sort successfully seldom, if ever, is adverse to making public his methods of procedure. After all he has little to gain by keeping the matter to himself and, appreciating the advice of other practical men in the same line of work, he is only too glad to contribute his own suggestions to the general fund of information.

About a year ago it was decided to open a department in the Scientific American devoted to the interests of the handy man. There was an almost immediate response. Hundreds of valuable suggestions poured in from every part of this country and from abroad as well. Not only amateur mechanics, but professional men as well were eager that the contributions came from men in other walks of life—resourceful men, who showed their aptness at doing things about the house, in the garden, on the farm. The electrician and the man in the physics and chemical laboratory furnished another tributary to the flood of ideas. Antomobiles, motor cycles, motor boats and the like frequently call for a display of ingenuity among a class of men who otherwise would never touch a tool. These also contributed a large share of suggestions that poured in upon us. It was apparent from the outset that the Handy Man's Workshop Department in the Scientific American would be utterly inadequate for so large a volume of material; but rather than reject any really useful ideas for lack of space, we have collected the worthler suggestions, which we present in the present volume. They have all been classified and arrarged in eight chapters, under the following headings:

I, Fitting up a Workshop; II, Shop Kinks; III, Soldering of Metals; IV. The Handy Man is the Factory; V. The Handy Man's Eperimental Laboratory; VI, The Handy Man About the House; VIII,

Concrete Pottery and Garden Furniture

By RALPH C. DAVISON

12mo. 200 Pages. 150 Illustrations. Price \$1.50 postpaid.

Price \$1.50 postpaid.

THIS work should appeal strongly to all those interested in ornamental concrete, as the author has taken up and explained in detail in a most practical manner the various methods of casting concrete in ornamental shapes. The titles of the thirteen chapters which this book contains will give a general least of the broad character of the work. They are entitled in the broad character of the work. They are entitled in the property of the broad character of the work. They are entitled from the cement Mortar into Form: II. Plaster Moids for Simple Forms; IV. Plaster Moids for Objects Having Curved Outlines; V. Combination of Casting and Modeling—An Egyption Vase; VI. Gibe Moids; VII. Colored Cements and Methods Used for Producing Postsigns with same the property of the producing besigns with same the producing the producing the standard by Hand and India With Order Concrete Benches; XII. Standard Benforcing.

The first two chapters explain a most unique and original method of working pottery which has been developed by the author. The chapter on color work alone is worth many times the cost of the book inasmuch as there is little known on this subject, and there is a large and growing demand for this class of work. The author has taken for granted that the reader known nothing whatever about the material and has explained each progressive step in the various operations throughqut in detail. These directions have been supplemented with half-tones and line Illustrations which are so clear that no one can misunderstand them. The amateur craftsman who has been working in clary will especially appreciate the adaptability of concrete for pottery work. Inasmuch as it is a cold process throughout, thus doing away with the necessit

Send your orders now, and a copy of the book desired will be mailed on the day of publication.

MUNN & CO., Inc., Publishers, 361 Broadway, New York



Your best negatives deserve, and your poorer negatives need:-

Velox is the only paper that is made with sole reference to the requirements of the amateur. The best develop-ers and finishers of amateur work use Velox exclusively because it is the only paper that works properly with negatives made under the harsh conditions of lighting that the amateur almost invariably

Don't permit anybody to insult your negatives with an inferior substitute.

f your developer and finisher loesn't use Velox, write us; vewill tell you of one who does.

NEPERA DIVISION,

Eastman Kodak Co. ROCHESTER, N. Y.



Cheap-and Reliable Water Supply NIAGARA HYDRAULIC RAM

4 H. P. Stationary Complete 690 10 H. P., Complete, \$140

For FACTORY USE, IRRIGATION WORK OR
ANY KIND OF PUMPING, FARMWORK, ETC.

OUARANTEED by a responsible concern. Write for full description of 3, 4, 6 and 10 H.P. Stationary Engines GRAY MOTOR CO., 11 Leib St., Detroit, Mich.

Government Homesteads

Over one and one half million acres of land open for settlement in Cheyenne River and Standing Rock Indian Reservations, October 4th to 23rd.

Registration at Pierre and Aberdeen, S. D.

rect route to registration points is the along & North Western Ry. secial low homeseckers' round trip rates.



W. R. Walker stuffing box. Dailey & M. E. Bradley de Coupse-and manure spreader, chaugh separator, A. Manssen, ag roll, F. B. Allen, applance, H. Tunnessen, 1 applance, H. Tunnessen, 1 bandage, Nord & Hillen, ttree attachment, W. A. Koch, indicator, C. A. Clark, mg device, fluid pressure, B. licator, C. A. Clark... device, fluid pressure, R. V. am ase, physician's hypodermic, S. re, R. V 934,138

934,296 033 838 indicator, automatic, W. E. 933,943

set holder and counter, combined, L. S.
Frambes
S. composition of matter to be used for,
B. & A. Gustiana
B. & B. Rurk
B. S. State of the second second

orpedo tube, C. Laurenti. 984,098
orps, John connection for mechanical, E. 984,098
Stelff Connection for mechanical, E. Stelff Connection for mechanical for mechanical for mechanical forms of the forms of the

lating device, W. H. Hulse 933,124, chine, C. H. Shepard 934,124, K. K. S. Hummer 934,124, re like, locking device for Pytlab

934,297 933,918 934,188 933,858

Valve mechanism for steam engines, J. C. Hrd Valve, quick acting safety, C. R. Mills. 334,083 Vapor burner, W. Chausse. 933,822, 333,823 Vehicle coupling, A. Weisler Vehicle drive gear, motor, J. A. Weiton. 934,175 Vehicle steering gear, E. N. Daniels. 934,134 Vehicle wheel, Inglee & Hart. 934,178 Vehicle wheel, road, G. 8. oglivis. 934,134 Vehicles, coupling for power transmission in motor, H. E. Coffin. Velvets, plushes, and similar fabrics, cutting appliance for, P. Hertzog Ventilating plate for laminated structures, P. A. Lange Violin, J. M. Gray 933,766 Violin, J. M. Gray 933,766 Violin, J. M. Gray 934,431 Wagon box corner fron, J. B. Cross. 934,413 Wagon box lifting and dumping device, J. Weil J. Myers 933,925 Washboard, J. Schneider 934,222 Washing machine operating mechanism, J. Edens Wagshing machine operating mechanism, J. Schen

933,895 933,913 933,954 Watch potence or balance foot, J. H. Gor-

Department of the potential of the poten



INVENTORS MACHINE ACCESSORIES AND NOVELTIES MFG. CO. PROVIDENCE, R. I.

> CONSULTING ENGINEER. ERNEST L. RANSOME Reinforced Concrete 11 Broadway, New York

SOUTHERN STAMPING & MFG. CO.
Manufacturers of special and patented articles.
R. S., Nashville, Tenn.

REBUILT AND RITERS
All Makes. All Prices. Quality Unsurpassed dead for behalfer American Writing Machine Co., 845 Broadway, N. Y.

CE MACHINES

Corlies Engines, Brewers

and Bottlers' Machinery. THE VILTER

MFG. CO., 800 Clinton St., Milwankoe, Wis

MODELS & EXPERIMENTAL WORK D CO., 24 Frankfort Street, New York

RUBBER Expert Manufacturers Fine Jobbing Work PARKER, STEARNS & CO., 288-290 Sheffield Av., B'klys, N. Y.

MODELS & EXPERIMENTAL WORK Chas. E. Dressier & Co., Metropolitan Bidg., 1 Madison Ave., New York

DIE MODELS SPECIAL
WORK TOOLS MACHINERY
NATIONAL STAMPING AND ELECTRIC WORKS
153-159 S. Jefferson Storet, Chicago, III.

MODELS & EXPERIMENTAL WORK Gears, Dies, Tools, Novettes manufact of M. P. SCHELL, 1759 Union Street, San Francisco

MASON'S NEW PAT. WHIP HOISTS Manfd. by VOLNEY W. MASON & CO., Inc

Experimental & Model Work

A MACHINE SHOP 80 Cortlandt Street

MODELS CHICAGO MODEL WORKS

ASBESTOS CRUDE DIRECT

R. H. MARTIN, OFFICE, ST. PAUL BUILDIN 220 B'way, New York

50 ENGRAVED CARDS OF YOUR HAME \$1.00

HOSKINS PHILA,



FROM KEROSENE (Coal Oil

Burning common terosene the ALAD MAYLELLAN generates me that gives al more brillians than city gas, gasoline or tricity, Simple, odorless ble; is revolutionizing lighting everywhere, Biggest Money Maker for Age Needed in every home. Every lawn sparant Needed in every home. Every lamp guaranteed, Solls itself, Ask our nearest office how you can get a lamp free or apply for agency proposition. THE MATTLE LAMP CO. of America, Deak 26. Chinaca, Parland. Ors. Warrbury. Com. Winsipe, Com.

AMERICA TO THE FORE.
YOU WANT HORSE POWER.
WE GUARANTEE HORSE POWER.
50 H. P. 200 LBS.
Five Hour Full Power Test. See It.
Designs for procellers and other mechanical parts of acroplanes with the same knowledge and care as is shown in our engine. Write New.
REQUA COLES COMPANY,
225 West 49th S.reet, - New York, N. Y.



BARKER MOTORS

"Imitated, but Not Equalled"
Fine mechanical features.
Honest power ratings.
Reasonable prices.

C. L. BARKER. Norwalk, - - - Conn.



P& USE GRINDSTONES P

If so we can supply you. All size mounted and unmounted, always kept in stock. Remember, we make a The CLEVELAND STONE CO.
6th Floor, Hickex Bidg., Cleveland, O.





YOU have a Right to INDEPENDENCE

Let Me Send You, NOW,

the story of this new business, with convin FACTS and FIGURES. Write today

American Collection Service, DETROIT, MICH.

Schools and Colleges



EXPERT SHORTHAND

SUCCESS SHORTHAND SCHOOL.
Suite 460 19 Clark Breet,
Suite 500 10 Clark Breet,
Suite 500 1416 Breedway
Hew York City, N. Y.
Address the cose center you

ELECTRICITY
PRACTICALLY AND INDIVIDUALLY
, TAUGHT

Through the medium of tools and mechinery. Out students learn by doing the work under the guidance of skilled instructors, in the largest and best equipped Electrical School in the U. S. Write or call for Prospectas. NEW YORK ELECTRICAL SCHOOL.







Either of Paul De Kock's Masterpieces

GUSTAVE or BARBER OF PARIS, literally translated, bound and illustrated in Roxburghe style de luxe, depicting the scenes of gayety in

REAL PARISIAN LIFE

and Pearson's Magazine for one year Only \$2.00

Two years' subscription and both books only \$3.75. Only a very limited number of books on hano—all we could get, however. Act quickly. Send your money to-day. Dept. 74, PEARSON'S MAGAZINE, New York City.



The Oil That Turns **Minutes To Miles**

VACUUM MOBILOIL

Ing every sulpossobile made and showing grade of ROBLOIL necessary for its perfect lubrication. Also contains track records to date and other facts of vital interest to motorists. MOBILOIL in barrels, and in cans wit stent pour ing apout, is sold by dealers ever there. Manufactured by

VACUUM OIL CO., Rochester, N. Y.

Curtiss Motorcycles

WORLD'S RECORD MOTORCYCLES trust frame. er bearing engine.

Roller bearing engine.
Light weight, great
priver.
Write for catalog and
bookist "Achievements"
THE HERRING-CURTISS CO., Hammondrport, N

GEER MOTORCYCLES



HARRY R. GEER CO., 851 McLaran Ave., ST. LOUIS, MO

Wizard Repeating LIQUID PISTOL



JAGER Marine 4-Cycle Engines

CHAS. J. JAGER CO. 281 Franklin, oor. Batterymarch St. Boston, Mass.

BELLE ISLE Marine



2 to 3 H. P. Bare Engine \$
Suttine, next powerful, efficient and reentrally new design, improved and
perficied in every detail—nakes speedy
istile launch frees an ordinary row
bank. Catalog describing all stone FIEEE.

New Belle Isle Motor Co., Dept 0, Detroit, Mich.



Motsinger Auto-Sparker

Magical Apparatus.

Make a Motor Boat of any Boat in 5 Minutes



You can do it with the Waterman Outboard Motor which you can quickly attach (and detach) to the stem of any skiff, row can display, punt, sail boat, and have a reliable 2 H. P. Manne Motor and stem of the skiff of

WATERMAN MARINE MOTOR CO. 1500 Fort Street, West, DETROIT, MICH., U.S. A.

The Greatest Fountain Pen Plan, Plant and Policy in the world are back of

Waterman's Ideal Fountain Pen

Find this imprint on a fountain pen and you will find the one that is popular for what it does—not for what it is said to do.







The Real Madam Du Barry

literally translated, full-page illustrations on Japan paper Edition de Luxe, Roxburghe library binding.

and Pearson's Magazine for 1 year Only \$2.00

Less than the lowest price that this, the Authentic Memoires, ever sold at. We were able to secure only a few copies. Here's your opportunity, but you must act quickly.

Mail your money to-day.

Dept. 74, PEARSON'S MAGAZINE, New York City.

Perfect One Horse-Power Engine At Last

It is the atrongoes and best small engine you ever saw. The work it will do will delight you—so easy to operate and to shift from one job to another. The Jack Junior, a One Horse-power Marvel, has horizontal tank which takes the piace of water jacket and does "waporator diarge water cooling tank required on other engines. Jack way with the large water cooling tank required on other engines. Jack way with the diarge water cooling tank required on other engines. Jack way with the diarge water cooling tank required on other engines. Jack way with the diarge water cooling tank required and the same part of the highest grade materials with all working parts expertly machine dished. Four cycle, water cooled, make and break electric ignition. Uses gazoline or kerosene at less than i cent per hour. Jack Junior will pump water, run cream separator, milking machine, churn, washing will pump water, run cream separator, milking machine, churn, washing will pump water, run cream separator, milking machine, churn, washing corn sheller or fee cream freezer—in fact, any machine not a dimensioned on the control of t Fairbanks, Morse & Co., Chicago

Holsman Automobiles

not shan autonoutle co.

Hotshan autonoutle co.

also 261 Ronadasch Sib Chicago

COLD GALVANIZING AMERICAN PROCESS. NO ROYALTIE SAMPLES AND INFORMATION OF A PPLICATION



NICKEL

Electro-Plating Apparates and Materials Hanson & VanWinkin Newark, N. J. 28 & 30 S. Canal & Chicago.

BENJAMIN AIR RIFLE

The Gun That Sh FOR MEN AND BOYS

For Everybody

large size wa... In steel. Our Electronic in steel. Our Electronic steel up to 3-16 rech. Grant nual training schools. We electric driven grinders. THE CINCINN ATI ELECTRIC TOOL CO.
and 652 Evans 8 reet, Cincinnati, Ohio, U. S. A.



you. Points are delicatel ted and smoothly ground nple card of 12 different ns sent for 6 cents postage

Pens for All Purposes

A Clean Shave

sharper all your dult bacter in a two coments, spring them a hairpointing due better than new. The motion automatic, no practice required, child can use it. It is the only tropper in the world that success. It is the only tropper in the world that success. It is the only tropper in the world that success. It is the only tropper in the world that success the success of price. Be sure to state for what make of Blads. Woney willingly refunded if not entirely satisfactory. Write for descriptive circular. Agents wanted.

recept of price. De munded if not enturery
Money willingly medical for the contract
Write for descriptive circular. Agents wanted.
GAYLOR AUTOMATIC STROPPER CO.
Stamford, Conn.



NTRILOQUISM

Learned by any Man or Boy at home. Small cost. See 10-day 2-cent stamp for particulars and proof. D. A. Smith, Room 1219, 523 Bigelow Street, Peorla E.



of the
And we can prove it. Anyone can opposite.

It. Makes 6 finished button photograph
initiate. Price of Camera-Scope, with
plice for making 300 pictures (en unla
pay for the complete outfit \$250.

Katra-buttons #1 per hundred; extra fire
\$1.0 per gross. He independent and and
money for yourself. Write today.

W. 3. MOUNTFORD, 100 Mades Line, New York 1

